DESCRIPTION

121-BB-6

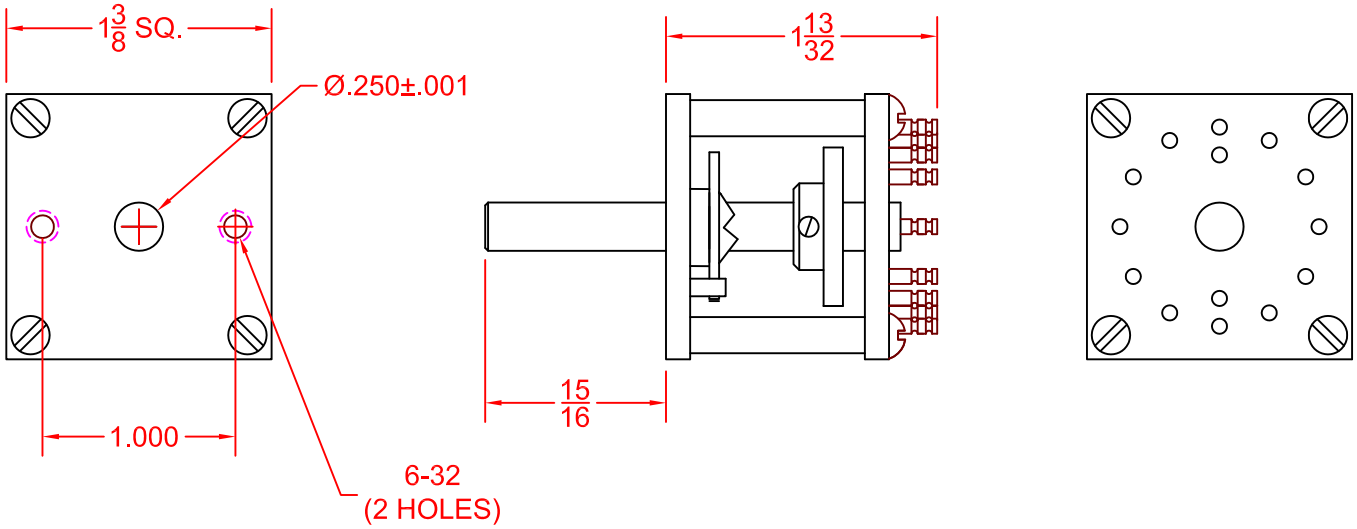

SHALLCO PART NUMBER 121-BB-6
DESCRIPTION:
NO. OF DECKS: 1
NO OF POLES PER DECK: 2
NUMBER OF POSITIONS: 6
TYPE ACTION: NON SHORTING (BREAK BEFORE MAKE)
ANGLE OF THROW: 30°

ELECTRICAL:
CURRENT CARRY CAPACITY: 10 AMPS
CURRENT SWITCHING CAPACITY: UP TO 2 AMPS
CONTACT RESISTANCE: .005 OHMS INITIAL
INSULATION RESISTANCE: 50,000 MEGOHMS INITIAL
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS INITIAL

MECHANICAL:
ROTATIONAL LIFE: 50,000 CYCLES MIN. (ONE CYCLE=ONE FULL CW AND ONE FULL CCW ROTATION)
STOP TORQUE: 50 IN-LBS
CONSTRUCTION: OPEN FRAME
WIPERS AND CONTACT PANELS: DUAL SILVER ALLOY WIPERS
EPOXY LAMINATE PANELS WITH .025 SILVER HEADED CONTACTS

DESCRIPTION
121-BB-6

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

DRAWN	P.DORMAN	5-17-13
SCALE	1X	

121-BB-6

SHEET 1 OF 1