SHALLCO SERIES 1 SWITCH

PART NUMBER 1A01-2SR

ELECTRICAL:
RATINGS (UL):
16A @ 250 VAC 16A @ 250 VDC
7.5A @ 600 VAC
3 /4 HP @ 240 VAC

VOLTAGE: 600 VAC, 250 VDC
SWITCHING CAPACITY: UP TO 16 AMPERES
DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS INITIAL
CONTACT RESISTANCE: 10 MILLIOHMS MAX. (4 MILLIOHMS AVERAGE)
INSULATION RESISTANCE: 1000 MEGHOHMS MIN. INITIAL

MECHANICAL:
POLES: 1
POSITIONS: 2 - MOMENTARY
(SPRING RETURN FROM ON BACK TO OFF)
INDEXING: 90°
CONTACTS: BREAK BEFORE MAKE
TERMINAL TYPE: SCREW
CONSTRUCTION: CLOSED

SUPPLIED WITH TERMINAL SCREWS AND KNOB

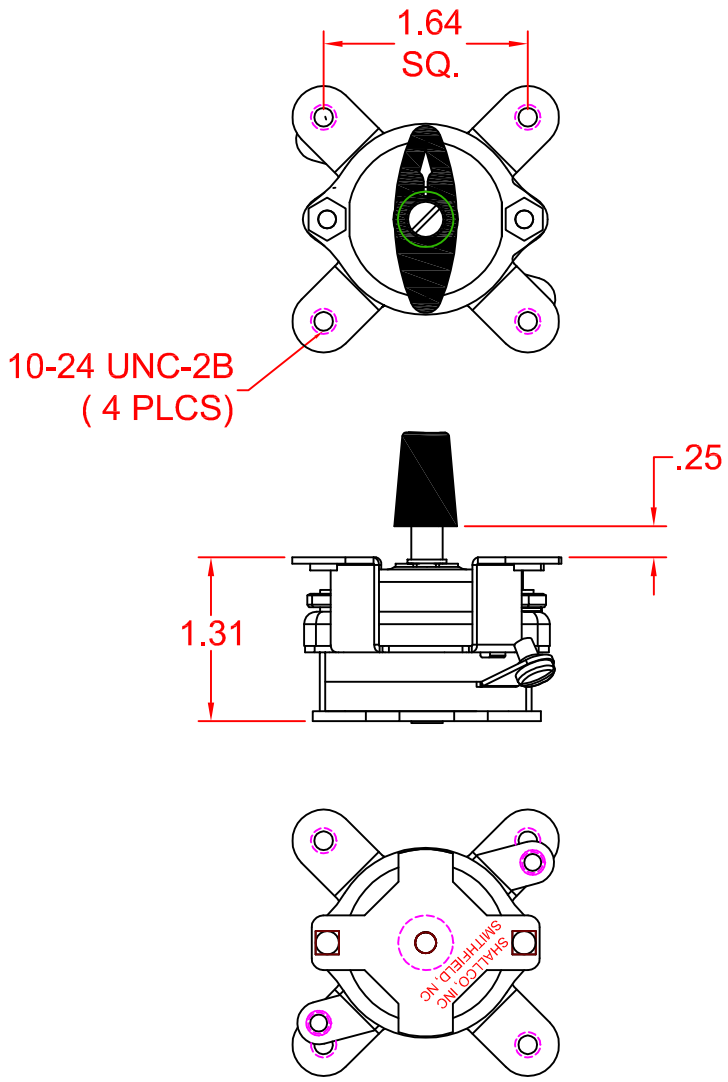

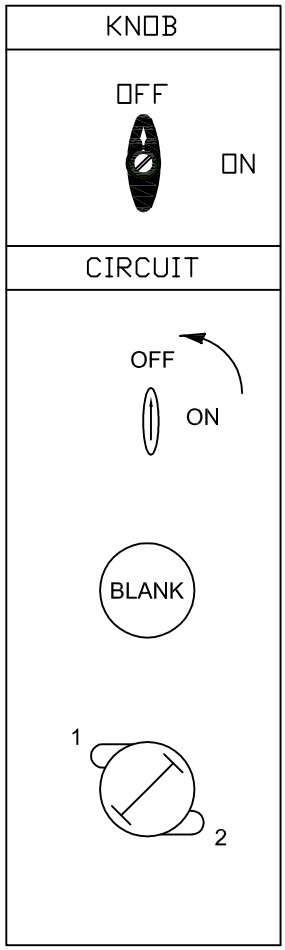

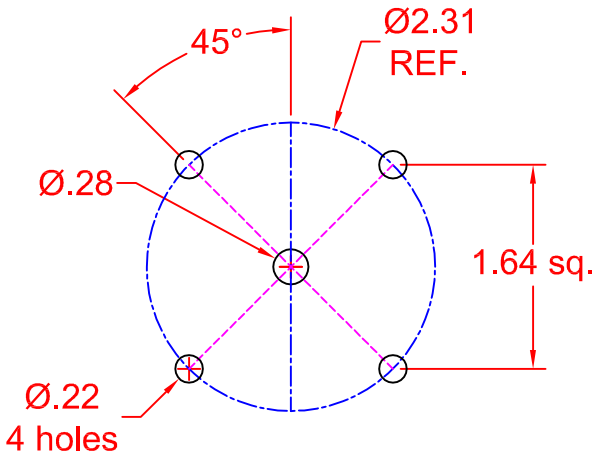

MOUNTING DETAIL

DESCRIPTION
1A01-2SR

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA