PART NUMBER: 1B04-2

ELECTRICAL:
RATINGS (UL):
16A @ 250 VAC 16A @ 250 VDC
7.5A @ 600 VAC
3 /4 HP @ 240 VAC

VOLTAGE: 600 VAC, 250 VDC
SWITCHING CAPACITY: UP TO 16 AMPERES
DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS INITIAL
CONTACT RESISTANCE: 10 MILLIOHMS MAX. (4 MILLIOHMS AVERAGE)
INSULATION RESISTANCE: 1000 MEGHOHMS MIN. INITIAL

MECHANICAL:
POLES: 4 POSITIONS: 2 (ON-ON)
INDEXING: 90° CONTACTS: BREAK BEFORE MAKE
TERMINAL TYPE: SCREW CONSTRUCTION: CLOSED
SWITCHING: NON-SHORTING

SUPPLIED WITH TERMINAL SCREWS AND KNOB

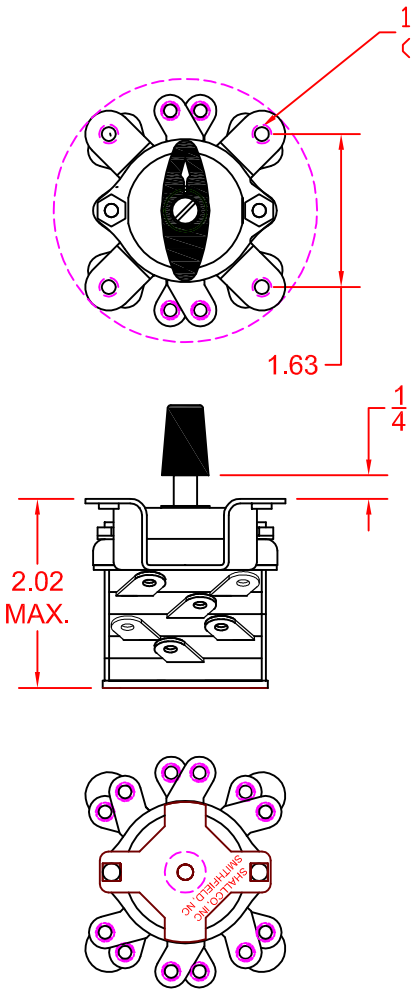

CONTACT TABLE

DECK	CONTACTS	POS 1	POS 2
1	1 — 3, 2		X
2	4 — 6, 5		X
3	7 — 9, 8		X
4	10 — 12, 11		X

KNOB



CIRCUIT

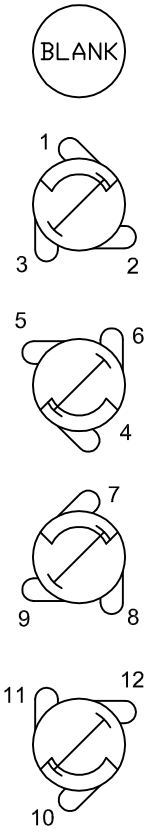

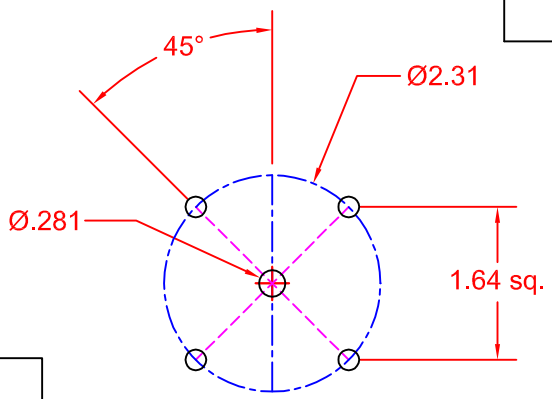

MOUNTING DETAIL

DESCRIPTION
1B04-2

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA