SHALLCO SERIES 1 SNAP ACTION SWITCH

PART NUMBER: 1C02-3

ELECTRICAL:
RATINGS (UL):
16A @ 250 VAC 16A @ 250 VDC
7.5A @ 600 VAC
3 /4 HP @ 240 VAC

VOLTAGE: 600 VAC, 250 VDC
SWITCHING CAPACITY: UP TO 16 AMPERES
DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS INITIAL
CONTACT RESISTANCE: 10 MILLIOHMS MAX. (4 MILLIOHMS AVERAGE)
INSULATION RESISTANCE: 1000 MEGHOHMS MIN. INITIAL

MECHANICAL:
POLES: 2 POSITIONS: (ON-OFF-ON)
INDEXING: 90° CONTACTS: BREAK BEFORE MAKE
TERMINAL TYPE: SCREW CONSTRUCTION: CLOSED
SWITCHING: NON-SHORTING

SUPPLIED WITH TERMINAL SCREWS AND KNOB

KNOB



CIRCUIT

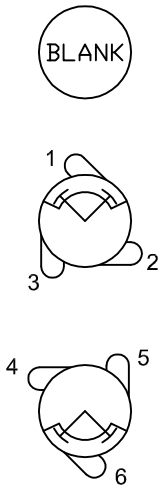

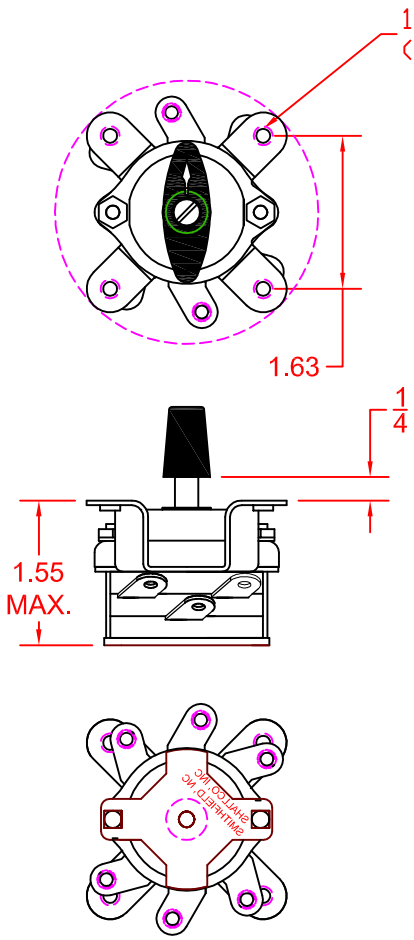

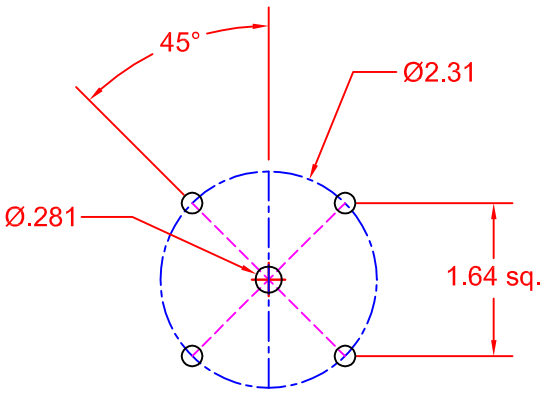

MOUNTING DETAIL

DESCRIPTION	APPROVED	P.DORMAN 3-31-10
1CO2-3	SCALE	.5X
	1CO2-3	
SHALLCO 308 COMPONENTS DRIVE SMITHFIELD, NC 27577 USA	SHEET 1 OF 1	