| REVISIONS | | | |
|---|---|---|---|
| LTR | DESCRIPTION | DATE | APP'D |

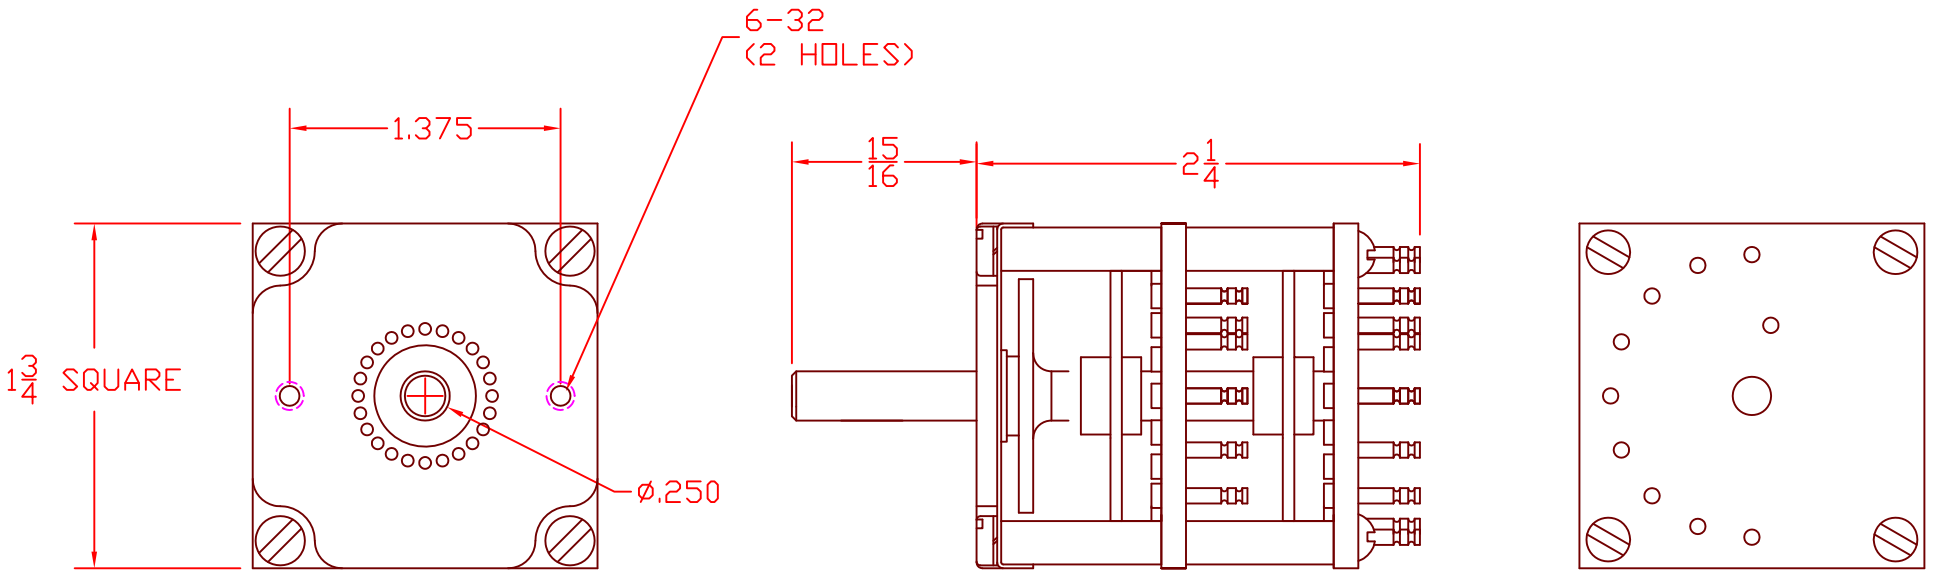


DESCRIPTION

SHALLCO PART NUMBER: 211-CB-9
NUMBER OF DECKS: 2
NUMBER OF POLES PER DECK: 1
NUMBER OF POSITIONS: 2
DETENT: STANDARD
ANGLE BETWEEN CONTACTS: 22-1/2°

SWITCHING: NONSHORTING
CURRENT CARRYING CAPACITY: 10 AMPERES
CURRENT SWITCHING CAPACITY: 2 AMPERES
CONTACT RESISTANCE, INITIAL: 5 MILLIOHMS MAX.
CONTACT RESISTANCE, AFTER LIFE: 10 MILLIOHMS MAX.
INSULATION RESISTANCE: 50,000 MEGOHMS
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS
DIELECTRIC WITHSTANDING VOLTAGE, AFTER LIFE: 1000 VRMS
ROTATIONAL LIFE: 50,000 CYCLES (ONE CYCLE = ONE FULL CLOCKWISE AND ONE FULL COUNTER CLOCKWISE ROTATION

DESCRIPTION

# 211-CB-9

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

| DRAWN | P.DORMAN | 4-11-08 |
|---|---|---|
| SCALE | 1 = 1 | |

211-CB-9

SHEET 1 OF 1