SHALLCO SERIES 26
Part Number: 26303B

SHALLCO

General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

Electrical Ratings:
25A/120 VAC
15A/600 VAC
20A/600 VAC (RES)
3A/125 VDC
1A/250 VDC

* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

DECK	CONTACTS	POSITIONS OFF	1	2	3	4	5	6	7
1	11								
	12		X						
	13			X					
	14				X				
	15					X			
	16						X		
	17							X	
	18								X
2	21								
	22		X						
	23			X					
	24				X				
	25					X			
	26						X		
	27							X	
	28								X
3	31								
	32		X						
	33			X					
	34				X				
	35					X			
	36						X		
	37							X	
	38								X

Mechanical:
* Sections: 3
* Positions: 8 Adjustable (See Truth Table)
* Indexing: 45° positive detent
* Rotational Life: 65,000 operations

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish

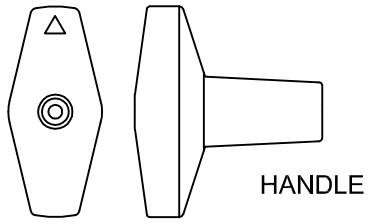

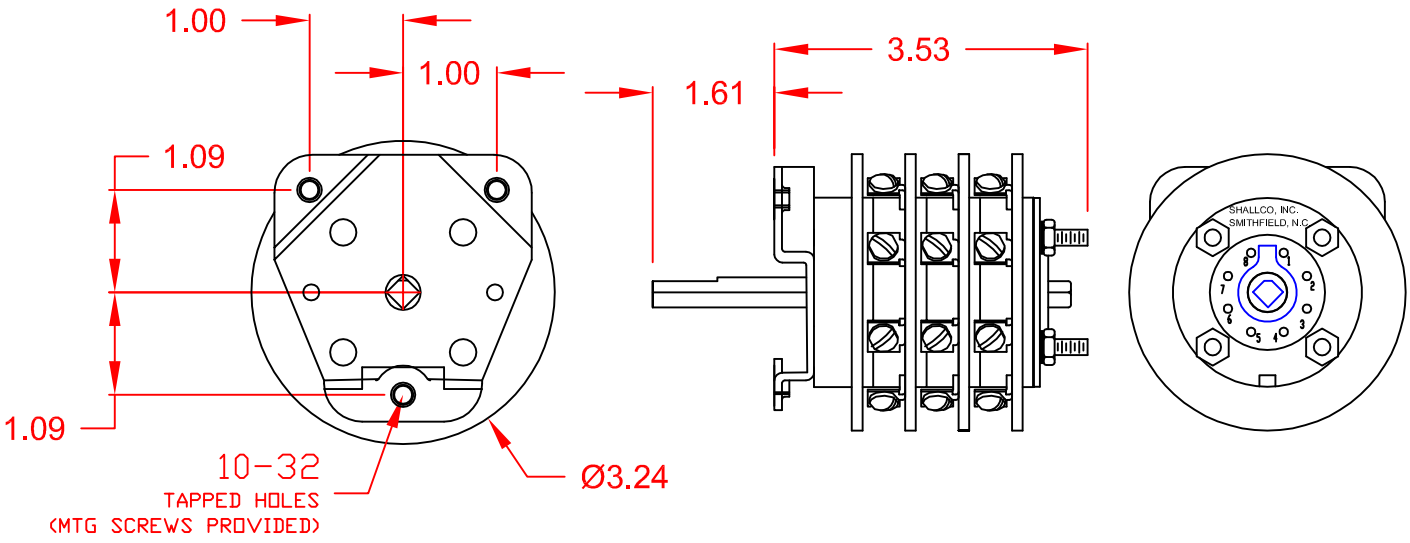

26303B

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA