SHALLCO SERIES 26
PART NUMBER: 26307B

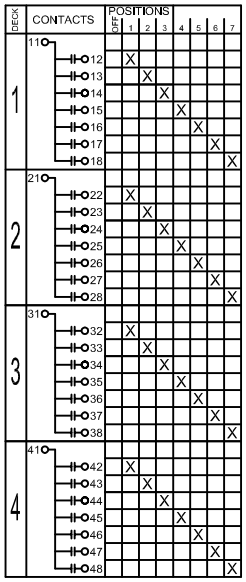

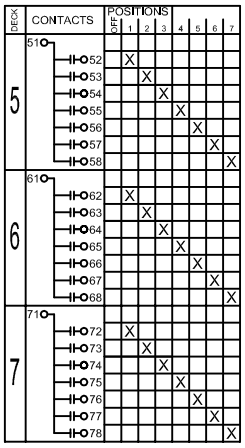

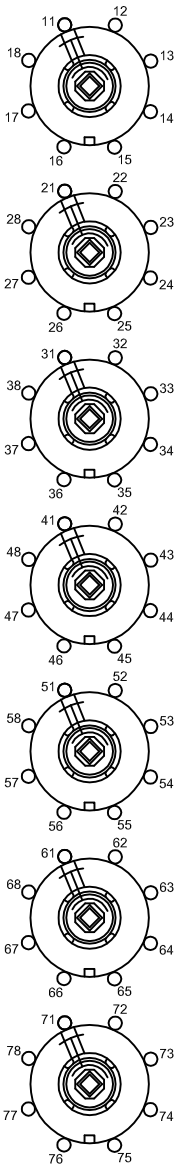

GENERAL:

MEETS REQUIREMENTS FOR 1 - 25 AMPERE SWITCHING OF RESISTIVE LOADS TO .75 POWER FACTOR AT VOLTAGES TO 600 V AC AND 250 VDC RESISTIVE LOADS

ELECTRICAL RATINGS:

25A/120 VAC
15A/600 VAC
20A/600 VAC (RES)
3A/125 VDC
1A/250 VDC

* CURRENT CARRYING CAPACITY: 25 AMPERES
* DIELECTRIC WITHSTANDING VOLTAGE: 2200 VRMS
* CONTACT RESISTANCE: INITIAL, 10 MILLIOHMS MAX.
* INSULATION RESISTANCE: 100 MEGOHMS MIN., INITIAL



MECHANICAL:

* SECTIONS: 7
* POSITIONS: 8 (ADJUSTABLE)
* INDEXING: 45° POSITIVE DETENT
* ROTATIONAL LIFE: 65,000 OPERATIONS

MATERIALS AND FINISHES:

* ROTORS AND STATORS: THERMOSET PLASTIC UL 94VO
* ROTOR CONTACTS: PHOSPHOR BRONZE
* STATOR CONTACTS: SILVER PLATED COPPER SCREW TYPE
* TERMINAL HARDWARE: SILVER PLATED BRASS
* EXTERIOR METAL: STEEL WITH ZINC CHROMATE FINISH

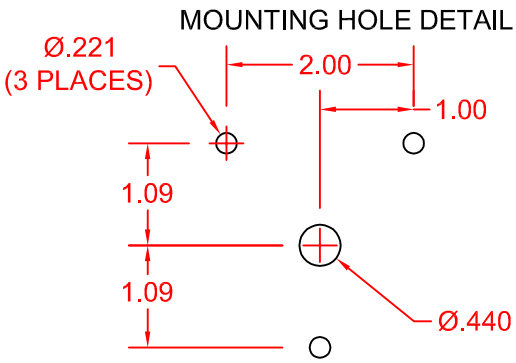

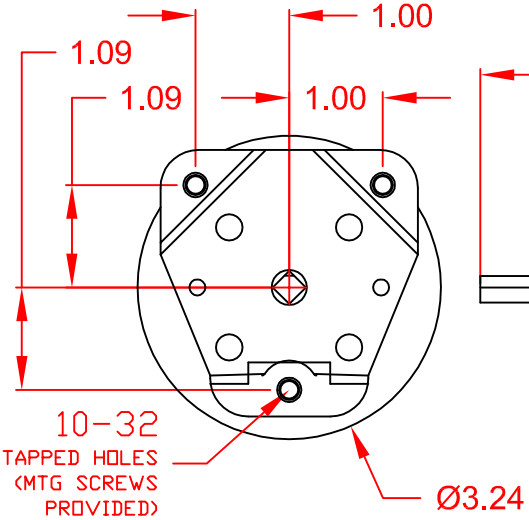

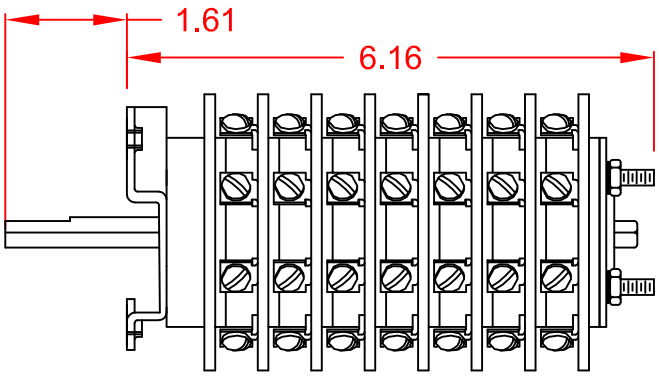



26307B

308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA