SHALLCO SERIES 26
Part Number: 2644D 125VDCABC

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 VDC resistive loads

Electrical:
* Ratings: 25A/120 VAC
15A/600 VAC
20A/600 VAC (RESISTIVE)
3A/125 VDC
1A/250 VDC

* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

* Switch is supplied with a lighted escutcheon plate:
Input voltage: 125 VDC (24 - 140 VDC)
Wiring: As shown

Mechanical:
* Sections: 3
* Positions: 2
* Detent Type: Sections 1 & 2 - Spring Return,
Section 3, Slip Detent
* Indexing: 45°
* Rotational Life: 65,000 operations

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

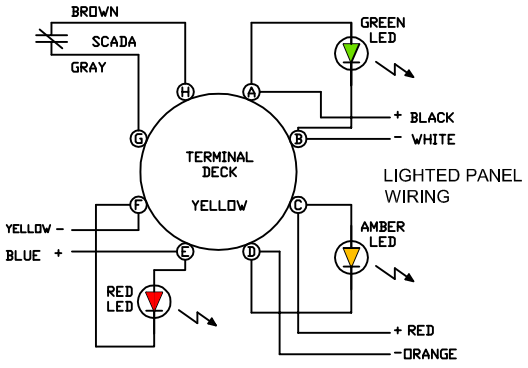

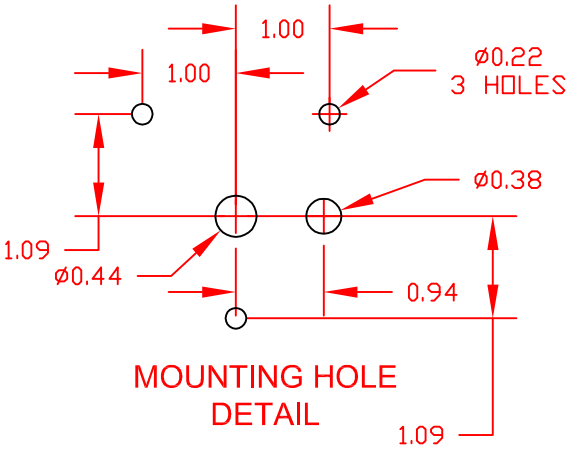
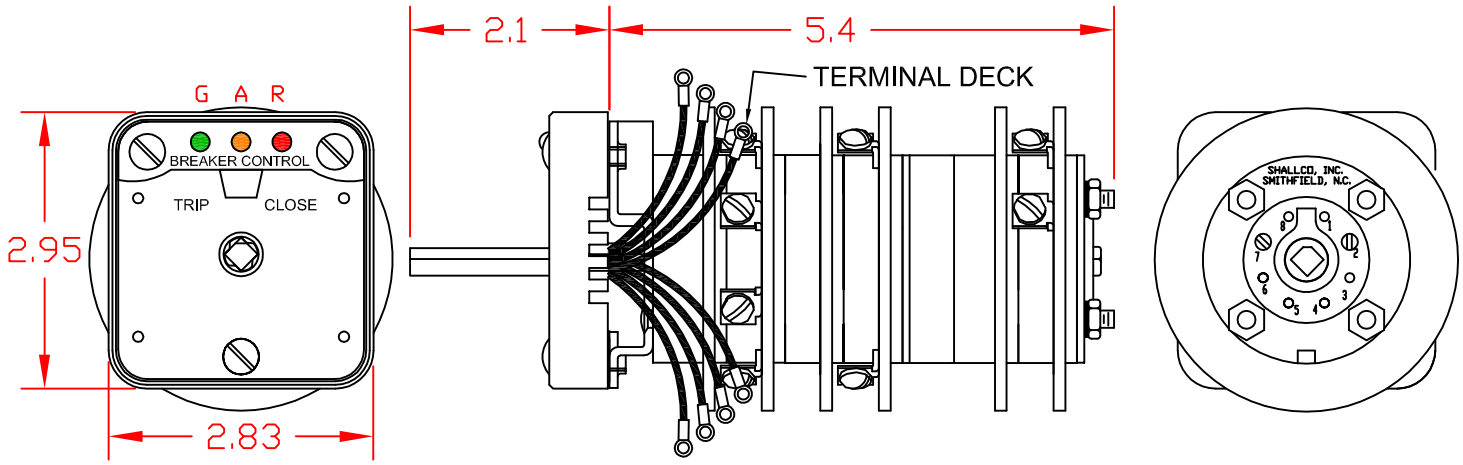
DECK	CONTACTS	POS. TRIP	nat	nac	CLOSE
1	11 — 18	X			
	16 — 17				X
2	21 — 22		X	X	
	25 — 26		X	X	
3	32 — 33			X	X
	36 — 37			X	X