SHALLCO SERIES 26
Part Number: 2645D 125VACAXC

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 VDC resistive loads

Electrical:
25A/120 VAC
15A/240 VAC
6A/600 VAC
3A/125 VDC
1A/250 VDC

*Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial
* Switch is supplied with a lighted escutcheon plate: Input voltage: 125 VAC (Wiring: As shown)

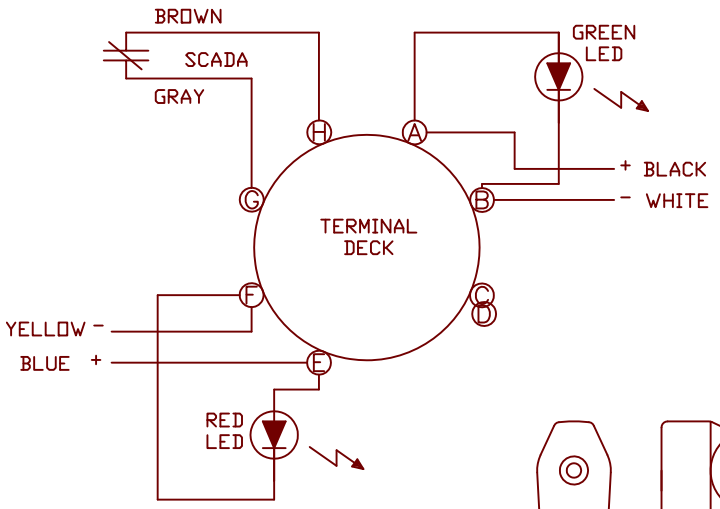

Mechanical:
* Sections: 4
* Number of positions: 2. Shaft will spring return to the center rest position (See contact table))
Detent type: Sections 1 & 2 - Spring Return
Sections 3 & 4 - Slip Detent
* Indexing: 45°
* Rotational Life: 65,000 operations

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

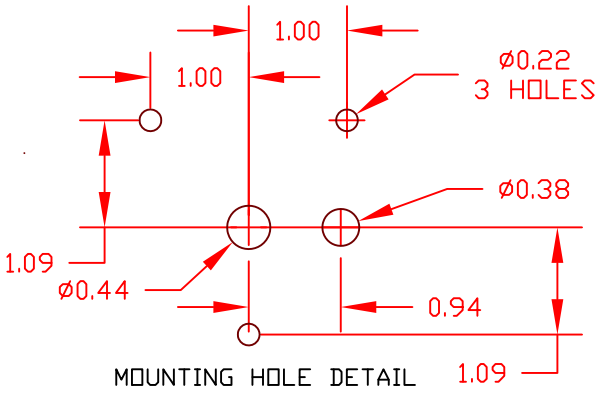

MOUNTING HOLE DETAIL


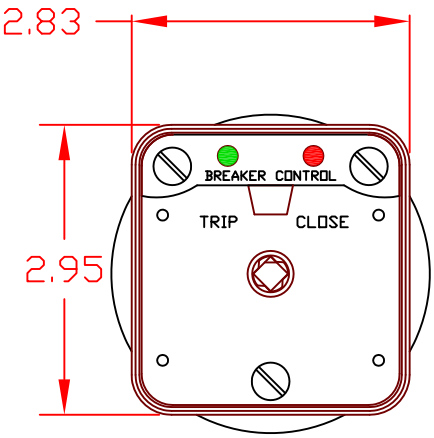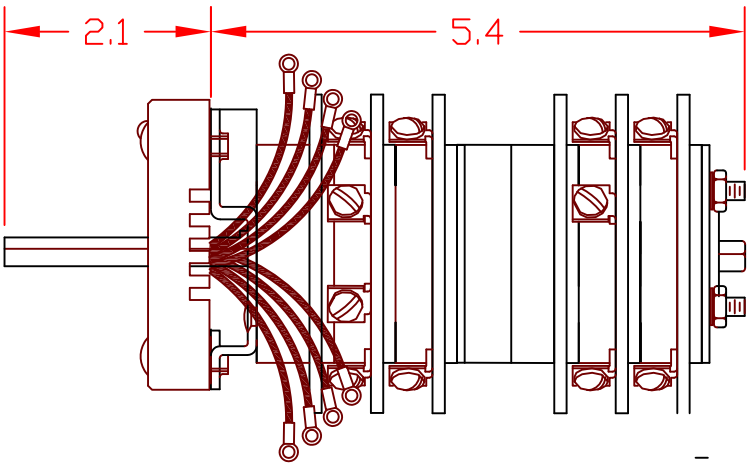
DECK	CONTACTS	POSITION TRIP	nat	nac	CLOSE
1	11 o—o 18	X			
	16 o—o 17				X
2	21 o—o 22		X	X	
3	32 o—o 33			X	X
	36 o—o 37			X	X
4	41 o—o 42	X	X		
	45 o—o 46	X	X