SHALLCO SERIES 26
Part Number: 2645D 48VDCABC

General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 VDC resistive loads

Electrical:
25A/120 VAC
15A/240 VAC
6A/600 VAC
3A/125 VDC
1A/250 VDC

*Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial
* Switch is supplied with a lighted escutcheon plate:
  Input voltage: 125 VDC (48 VDC) (Wiring: As shown)

Mechanical:
* Sections: 4
* Number of positions: 2. Shaft will spring return to the center rest position (See contact table))
* Detent type: Sections 1 & 2 - Spring Return
  Sections 3 & 4 - Slip Detent
* Indexing: 45°
* Rotational Life: 65,000 operations

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

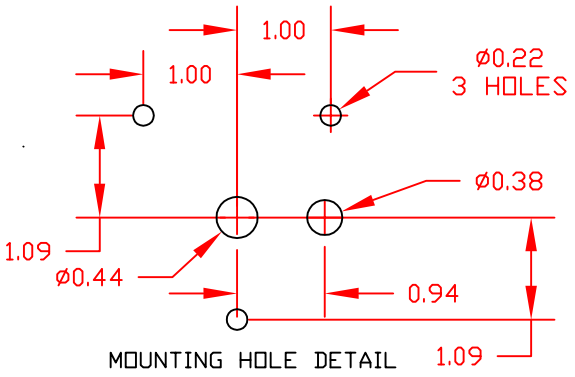

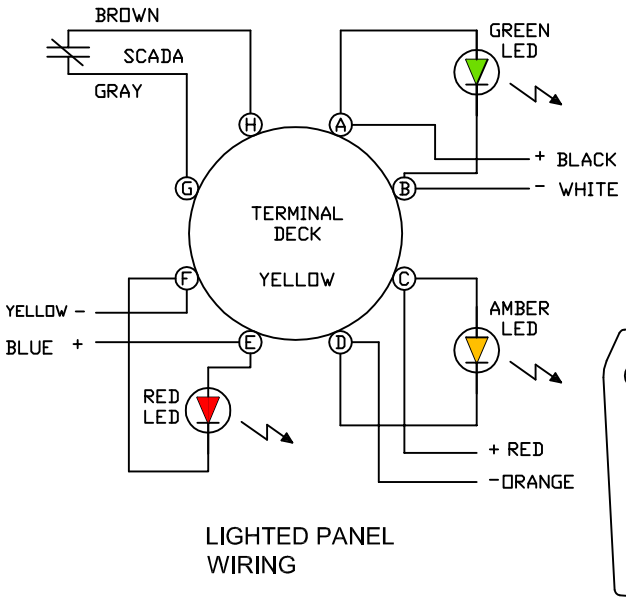

LIGHTED PANEL WIRING


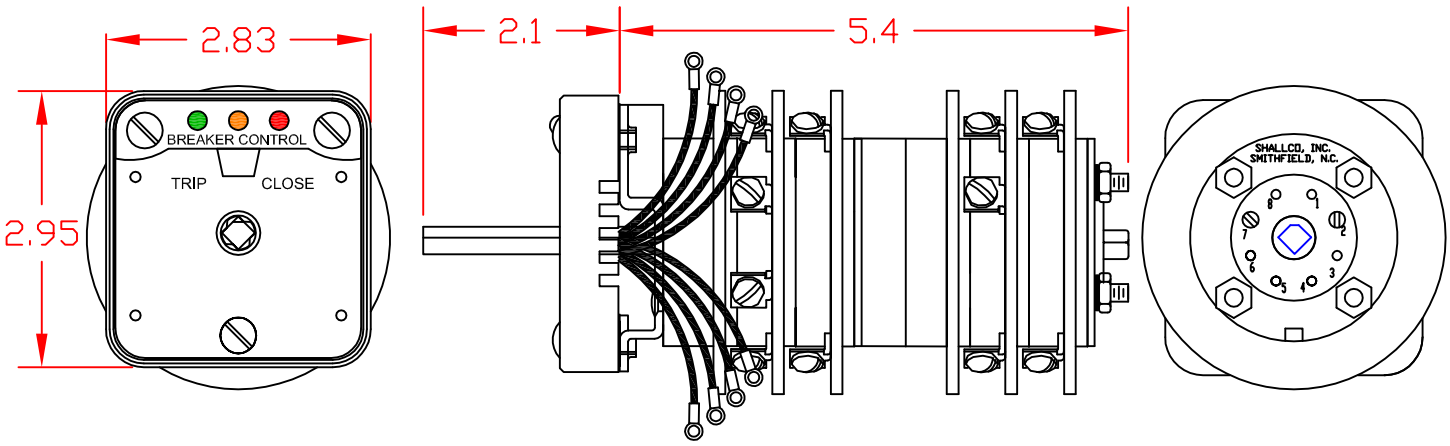
DECK	CONTACTS	POSITION TRIP	not	nac	CLOSE
1	11 o—| |—o 18	X			
	16 o—| |—o 17				X
2	21 o—| |—o 22		X	X	
3	32 o—| |—o 33			X	X
	36 o—| |—o 37			X	X
4	41 o—| |—o 42	X	X		
	45 o—| |—o 46	X	X