SHALLCO SERIES 26 SWITCH

PART NUMBER: 2646D 125VDCAXC

DESCRIPTION:
- NUMBER OF DECKS: 4 ACTIVE
- NUMBER OF POSITIONS: 2 SHAFT WILL SPRING RETURN TO THE CENTER REST POSITION (SEE TRUTH TABLE)
- TYPE ACTION: NONSHORTING
- DETENT TYPE: SECTIONS 1 & 2 - SPRING RETURN,
- DETENT TYPE: SECTIONS 3 & 4 - SLIP DETENT
- ESCUTCHEON PLATE: AS SHOWN
- HANDLE TYPE: D (PISTOL GRIP)

SWITCH IS SUPPLIED WITH LIGHTED ESCUTCHEON PLATE
INPUT VOLTAGE: 125 VDC
WIRING: AS SHOWN

DECK	CONTACTS	POS. TRIP	nat	nac	CLOSE
1	11 — 18	X			
	14 — 15	X			
2	21 — 22		X	X	
	26 — 27				X
3	32 — 33			X	X
	36 — 37			X	X
4	42 — 43			X	X
	46 — 47			X	X



RATINGS:
- 25A/120 VAC
- 15A/240 VAC
- 6A/600 VAC
- 3A/125 VDC
- 1A/250 VDC

DIELECTRIC STRENGTH: 2200 VRMS

INSULATION RESISTANCE: 100 MEGOHMS MINIMUM INITIAL

CONTACT RESISTANCE: 10 MILLIOHMS INITIAL

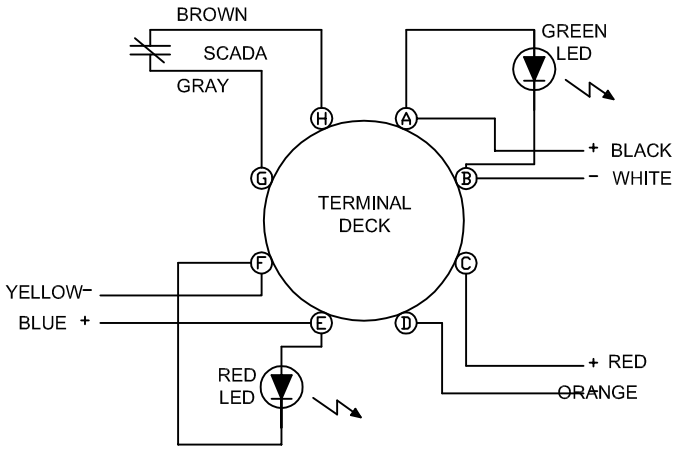

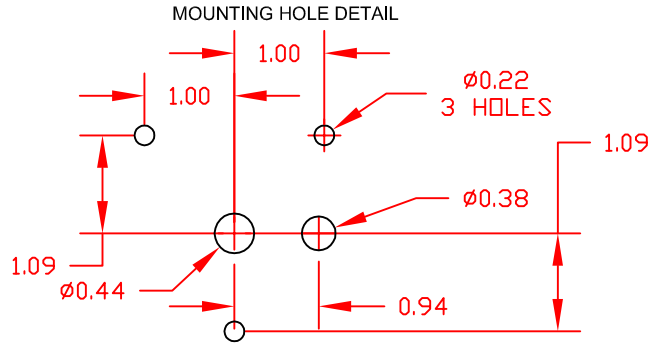

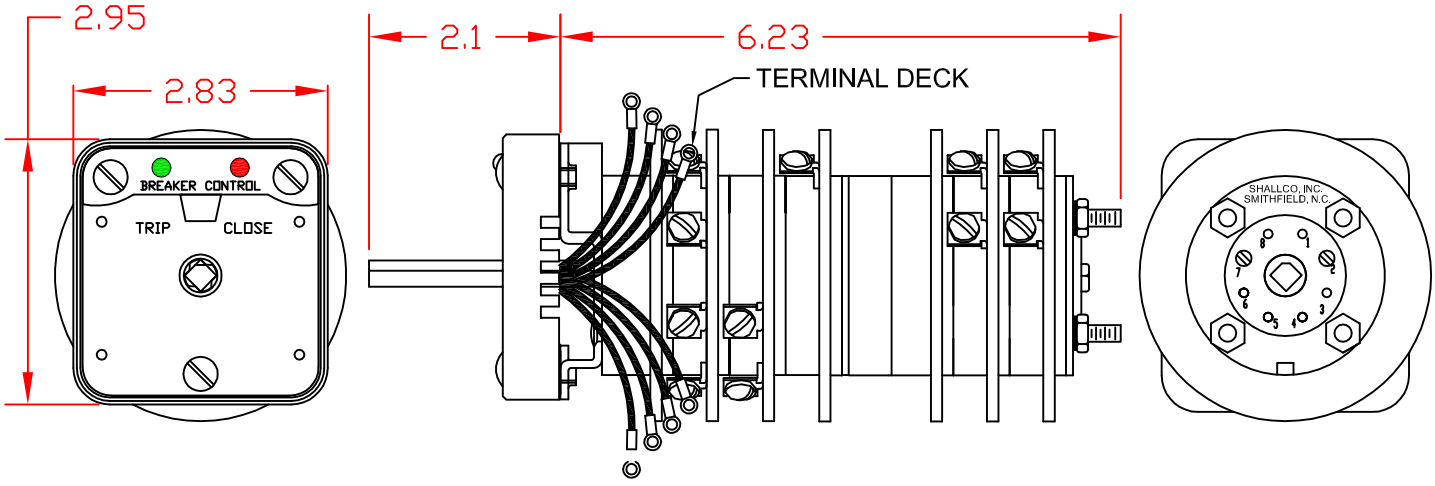

DESCRIPTION
2646D 125VDCAXC
REV. -

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA