# SHALLCO SERIES 26
# Part Number: 26502D-2

## General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 VDC resistive loads

## Electrical:
* Ratings: 25A/120 VAC
  15A/600 VAC
  20A/600 VAC (RESISTIVE)
  3A/125 VDC
  1A/250 VDC
* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

## Mechanical:
* Sections: 2
* Positions:2
* Indexing: 45°
* Rotational Life: 65,000 operations

## Materials and Finishes:
* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

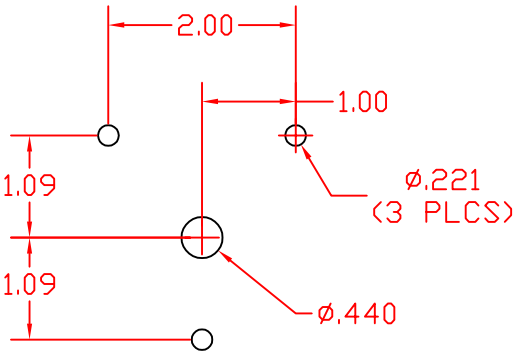

MOUNTING HOLE DETAIL

Contact Table

| DECK | CONTACTS | POSITION 1 | POSITION 2 |
|---|---|---|---|
| 1 | 11 — 13 | X | |
| | 12 — 14 | | X |
| | 15 — 17 | X | |
| | 16 — 18 | | X |
| 2 | 21 — 23 | X | |
| | 22 — 24 | | X |
| | 25 — 27 | X | |
| | 26 — 28 | | X |







HANDLE



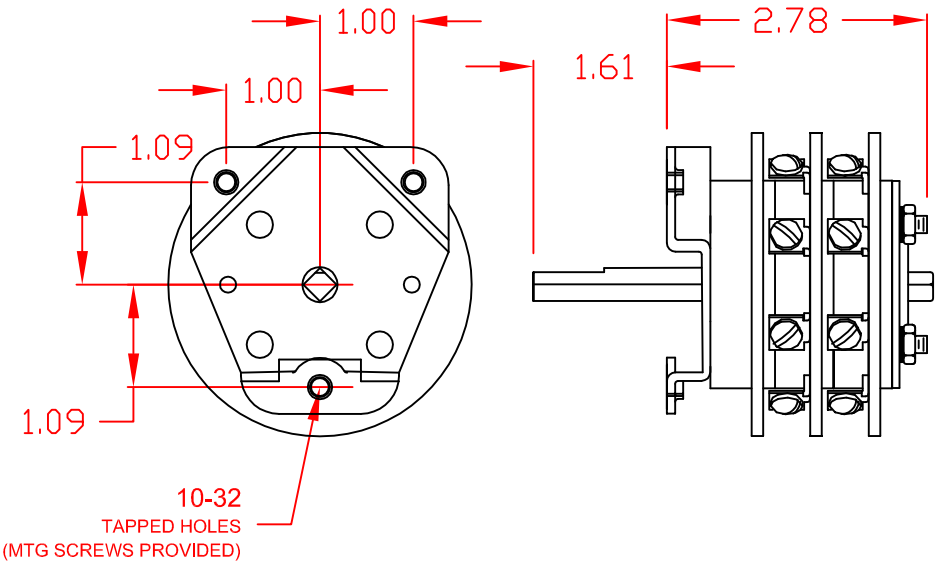


26502D-2

REV. A

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA