SHALLCO SERIES 26
Part Number: 26507B-2

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 VDC resistive loads

Electrical:

* Ratings: 25A/120 VAC
  15A/600 VAC
  20A/600 VAC (RESISTIVE)
  3A/125 VDC
  1A/250 VDC
* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

Mechanical:

* Sections: 7
* Positions: 2 (ON-ON) See Table
* Indexing: 45°
* Rotational Life: 65,000 operations

Materials and Finishes:

* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

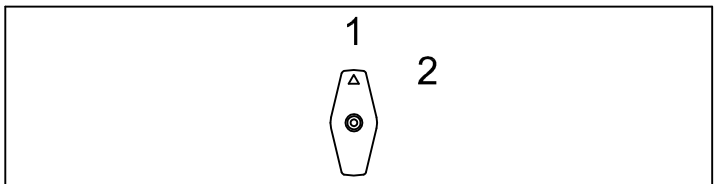

DECK	CONTACTS	POS. 1	POS. 2
1	11 — 13	X	
	12 — 14		X
	15 — 17	X	
	16 — 18		X
2	21 — 23	X	
	22 — 24		X
	25 — 27	X	
	26 — 28		X
3	31 — 33	X	
	32 — 34		X
	35 — 37	X	
	36 — 38		X
4	41 — 43	X	
	42 — 44		X
	45 — 47	X	
	46 — 48		X

DECK	CONTACTS	POS. 1	POS. 2
5	51 — 53	X	
	52 — 54		X
	55 — 57	X	
	56 — 58		X
6	61 — 63	X	
	62 — 64		X
	65 — 67	X	
	66 — 68		X
7	71 — 73	X	
	72 — 74		X
	75 — 77	X	
	76 — 78		X

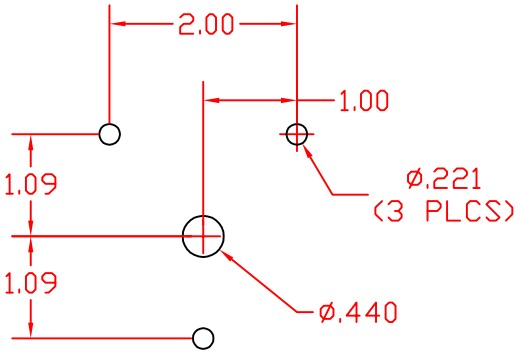

MOUNTING HOLE DETAIL



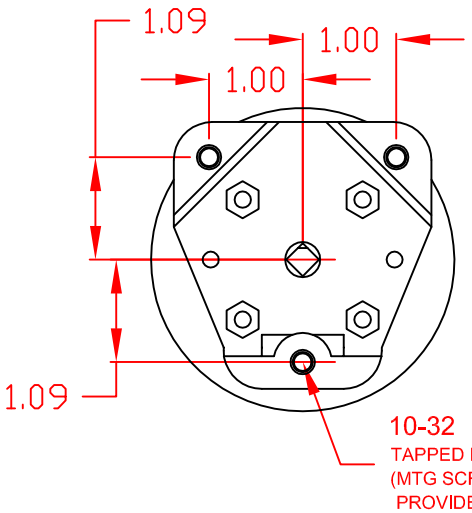

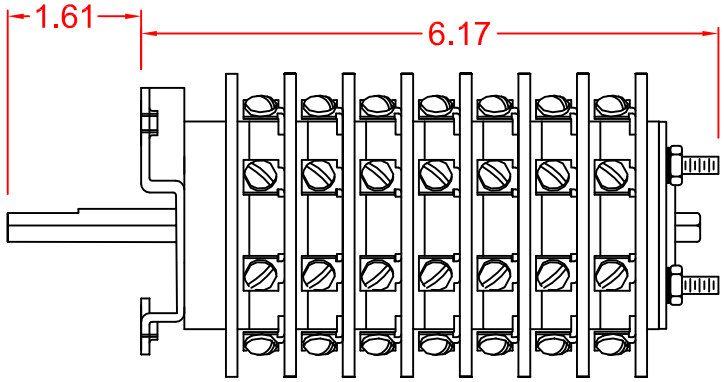

26507B-2

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA