SHALLCO SERIES 26

Part Number: 2650D 24VDCAXC

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 VDC resistive loads

Electrical:
* Ratings: 25A/120 VAC
  15A/600 VAC
  20A/600 VAC (RESISTIVE)
  3A/125 VDC
  1A/250 VDC
* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

*Lighted panel voltage 24 to 140 VDC

Mechanical:
* Sections: 3
* Positions: See contact table
* Detent type: Spring return with Pull to Lock in extreme counter-clockwise position.
* Indexing: 45°
* Rotational Life: 65,000 operations

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic



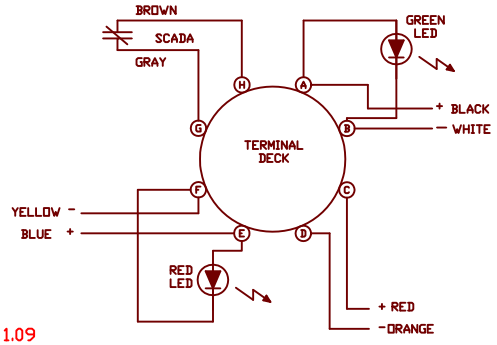

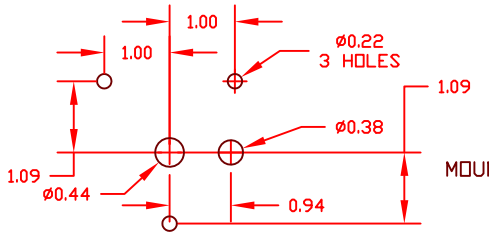

MOUNTING HOLE DETAIL

DECK	CONTACTS	POSITION: PULL TO LOCK	TRIP	nat	nac	CLOSE
1	11 – 18	X	X			
2	22 – 23					X
	26 – 27					X
3	31 – 35	X	X	X	X	X
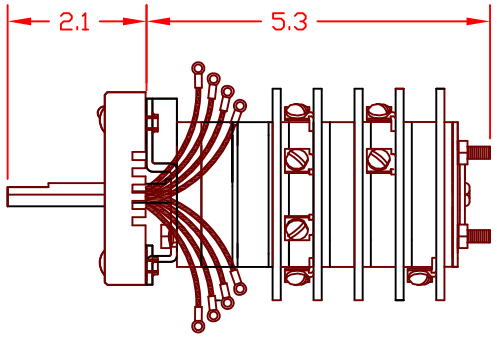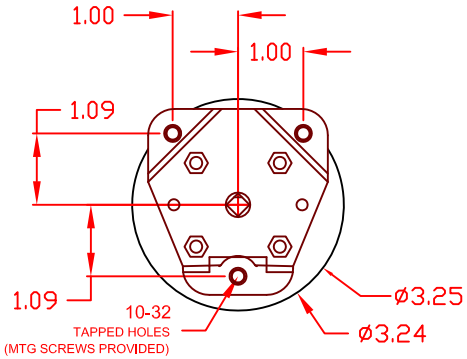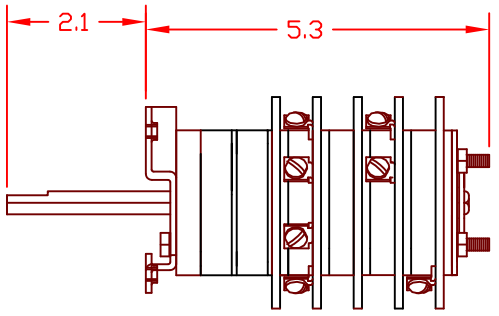
NOTE: DECKS 1 AND 3 ARE MAKE-BEFORE-BREAK