SHALLCO SERIES 26

SHALLCO 308 COMPONENTS DRIVE SMITHFIELD, NC 27577 USA

Part Number: 2657D 125VDCABC

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 VDC resistive loads

Electrical:

* Ratings: 25A/120 VAC
  15A/600 VAC
  20A/600 VAC (RESISTIVE)
  3A/125 VDC
  1A/250 VDC

* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

*Lighted panel voltage 24 to 140 VDC

Mechanical:

* Sections: 5
* Positions: See contact table
* Type Action: Nonshorting
  Detent type: Sections 1, 2, 3 - Spring Return
  Detent type: Sections 4 & 5, Slip Detent
* Indexing: 45°
* Rotational Life: 65,000 operations

Materials and Finishes:

* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic



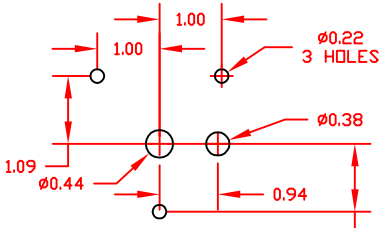

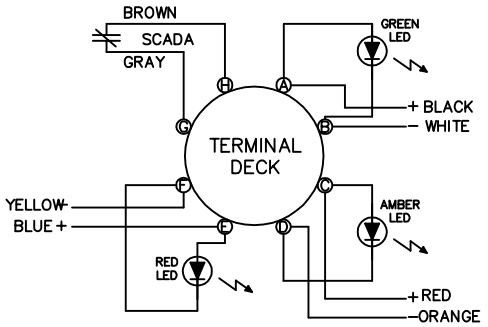

DECK	CONTACTS	POS. TRIP	nat	nac	CLOSE
1	12 — 13				X
	16 — 17				X
2	21 — 28	X			
	24 — 25	X			
3	31 — 32		X	X	
	35 — 36		X	X	
4	42 — 43			X	X
	46 — 47			X	X
5	51 — 52	X	X		
	55 — 56	X	X		



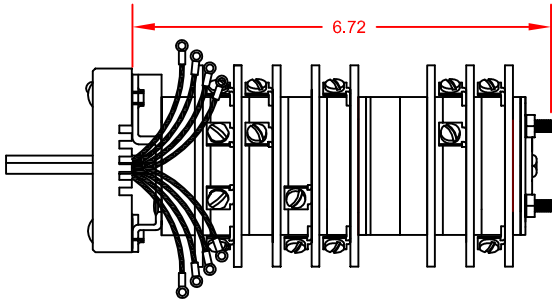

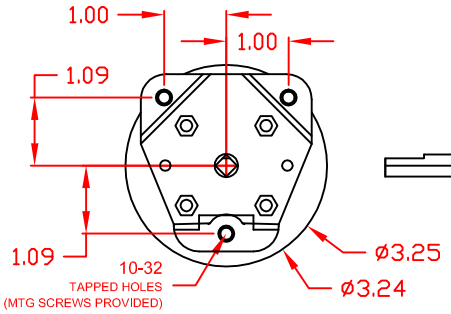

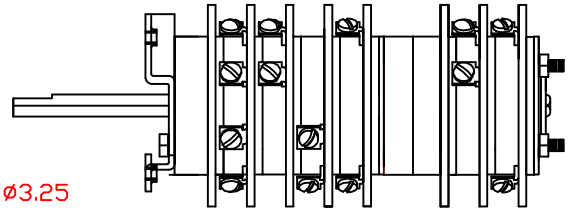



2657D 125VDCABC

SHALLCO 308 COMPONENTS DRIVE SMITHFIELD, NC 27577 USA