SHALLCO SERIES 26

Part Number: 2658D 120VACABC

Description: BREAKER CONTROL SWITCH
with Lighted Nameplate (120 VAC)

General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 VDC resistive loads

Electrical:

* Ratings: 25A/120 VAC
15A/600 VAC
20A/600 VAC (RESISTIVE)
3A/125 VDC
1A/250 VDC
* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

Mechanical:
* Sections: 6
* Positions: See contact table
* Detent type: Decks 1 - 4 spring return with Pull to Lock in extreme counter-clockwise position.
Decks 5 and 6 detented slip contacts
* Indexing: 45°
* Rotational Life: 65,000 operations

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

LIGHTED NAMEPLATE
(WIRE LENGHTS APPROX 20 INCHES)

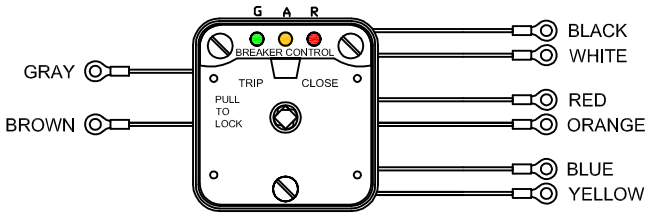

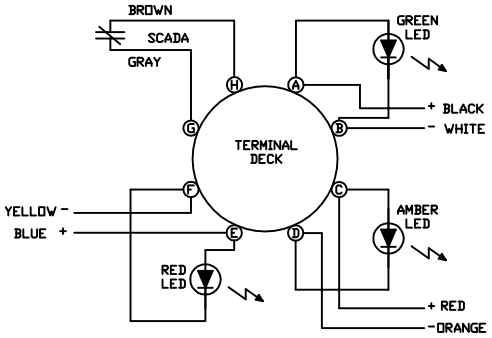

HANDLE



DECK	CONTACTS	POSITIONS				
		PULL-TL	TRIP	nat	nac	CLOSE
1	120-II-II-013					X
	160-II-II-017					X
2	210-II-II-028		X			
	240-II-II-025		X			
3	330-II-II-034	X				
	370-II-II-038	X				
4	410-II-II-042			X	X	
	450-II-II-046			X	X	
5	520-II-II-053				X	X
	560-II-II-057				X	X
6	610-II-II-062		X	X		
	650-II-II-066		X	X		

CONTACT TABLE

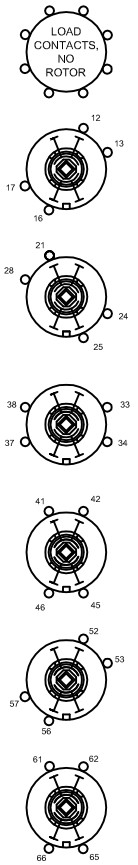



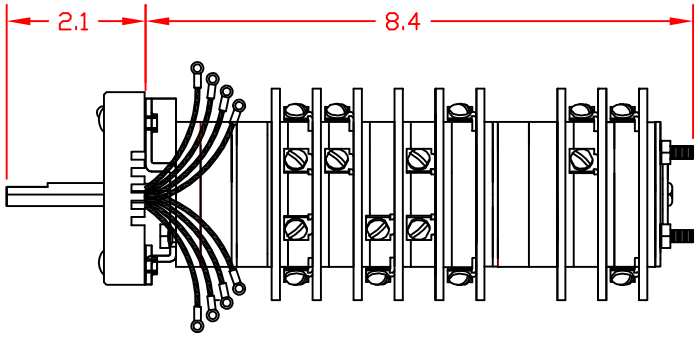

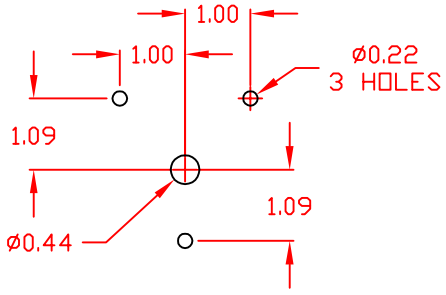

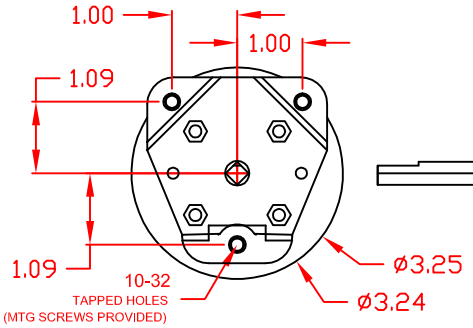

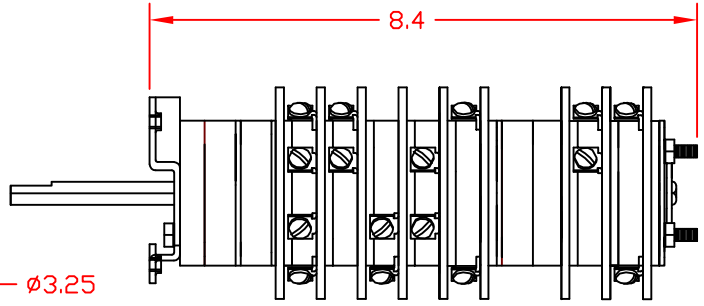



2658D 120VACABC

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA