SHALLCO SERIES 26
Part Number: 26704B

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

Electrical:

15A/600 VAC
20A/600 VAC (RES)
25A/125 VAC
3A/125 VDC
1A/250 VDC

* Voltages: 250 V DC, 600 V AC
* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

CONTACT TABLE

DECK	CONTACTS	POSITION 1	2	3	4	5	6	7	8
1	11 o—o 15	X				X			
	12 o—o 16		X				X		
	13 o—o 17			X				X	
	14 o—o 18				X				X
2	21 o—o 25	X				X			
	22 o—o 26		X				X		
	23 o—o 27			X				X	
	24 o—o 28				X				X
3	31 o—o 35	X				X			
	32 o—o 36		X				X		
	33 o—o 37			X				X	
	34 o—o 38				X				X
4	41 o—o 45	X				X			
	42 o—o 46		X				X		
	43 o—o 47			X				X	
	44 o—o 48				X				X

Mechanical:

* Sections: 4
* Positions: 8 (adjustable)
* Operation: Non-Shorting
* Indexing: 45° positive detent
* Handle: Oval
* Escutcheon Plate supplied (blank)
* Rotational Life: 65,000 operations



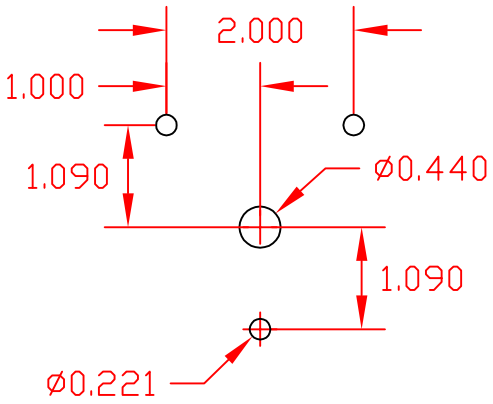

MOUNTING HOLE DETAIL

Materials and Finishes:

* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish

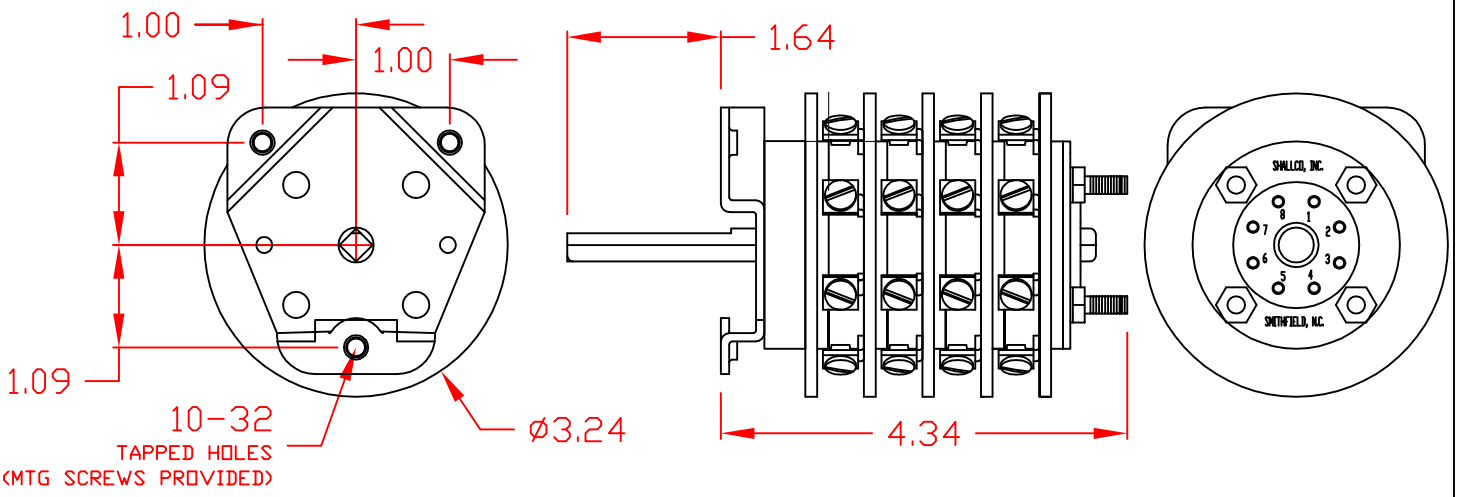

26704B

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

CUSTOMER REFERENCE:

TERMINAL SCREW TIGHTENING TORQUE: : 8 IN-LBS.