PART NUMBER 3B03-2

ELECTRICAL:

ELECTRICAL:
VOLTAGE: 500 VAC, 250 VDC
CARRYING CAPACITY: 45 AMPERES
SWITCHING CAPACITY: UP TO 30 AMPERES

DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS INITIAL
CONTACT RESISTANCE: 10 MILLIOHMS MAX. (4 MILLIOHMS AVERAGE)
INSULATION RESISTANCE: 1000 MEGHOHMS MIN. INITIAL

MECHANICAL:
POLES: 3
POSITIONS: 2
INDEXING: 90°
CONTACTS: BREAK BEFORE MAKE
TERMINAL TYPE: SCREW CONSTRUCTION: CLOSED

SUPPLIED WITH MOUNTING HARDWARE,
TERMINAL SCREWS, AND KNOB

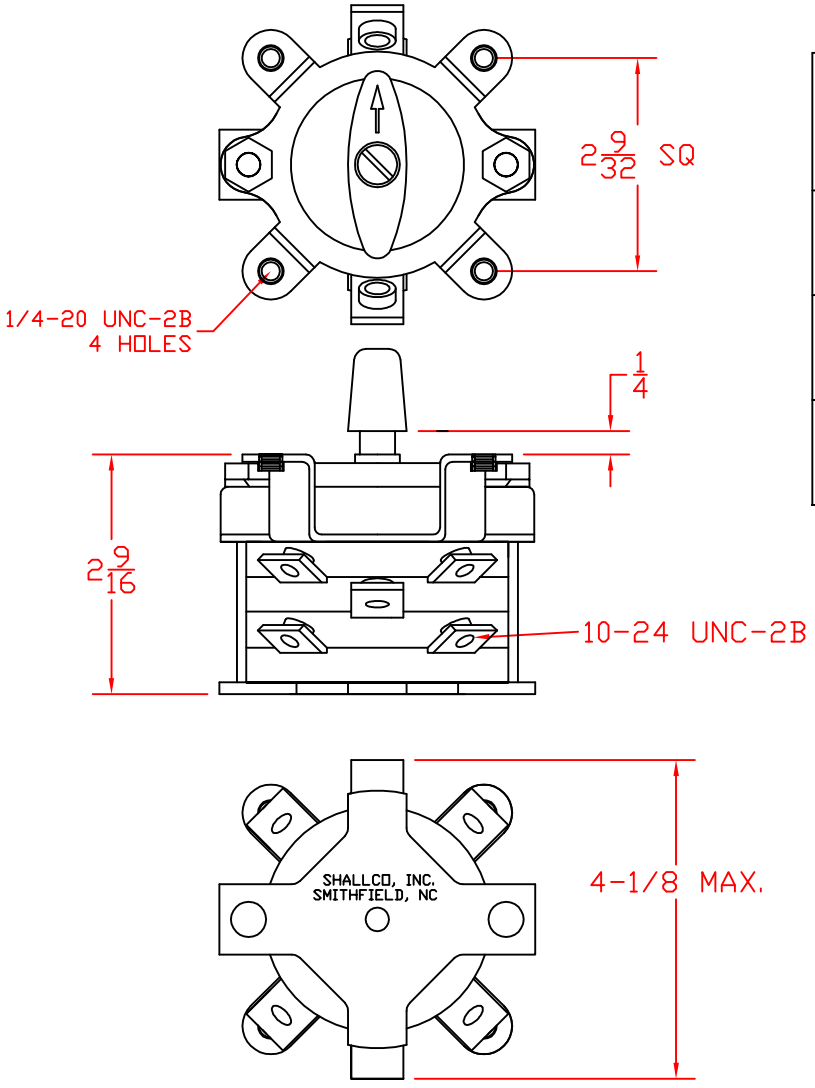

DECK	CONTACTS	POS. 1	POS. 2
1	1 — 2	X	
	1 — 3		X
2	4 — 5	X	
	4 — 6		X
3	7 — 8	X	
	7 — 9		X

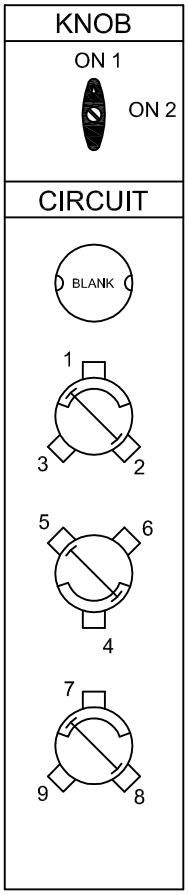

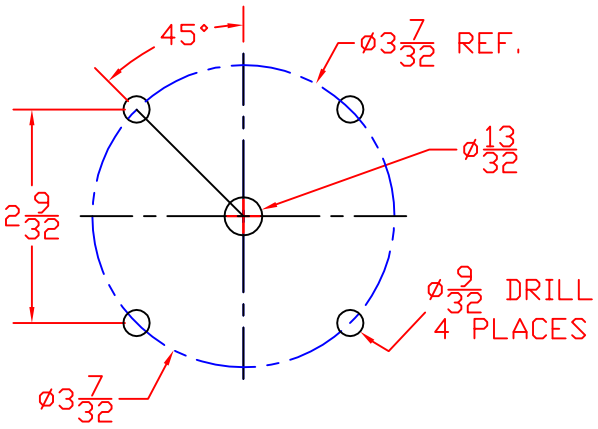

MOUNTING HOLE DETAIL

DESCRIPTION

3B03-2

REV. A

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA