7604D 125VDCCXAWP

SHALLCO

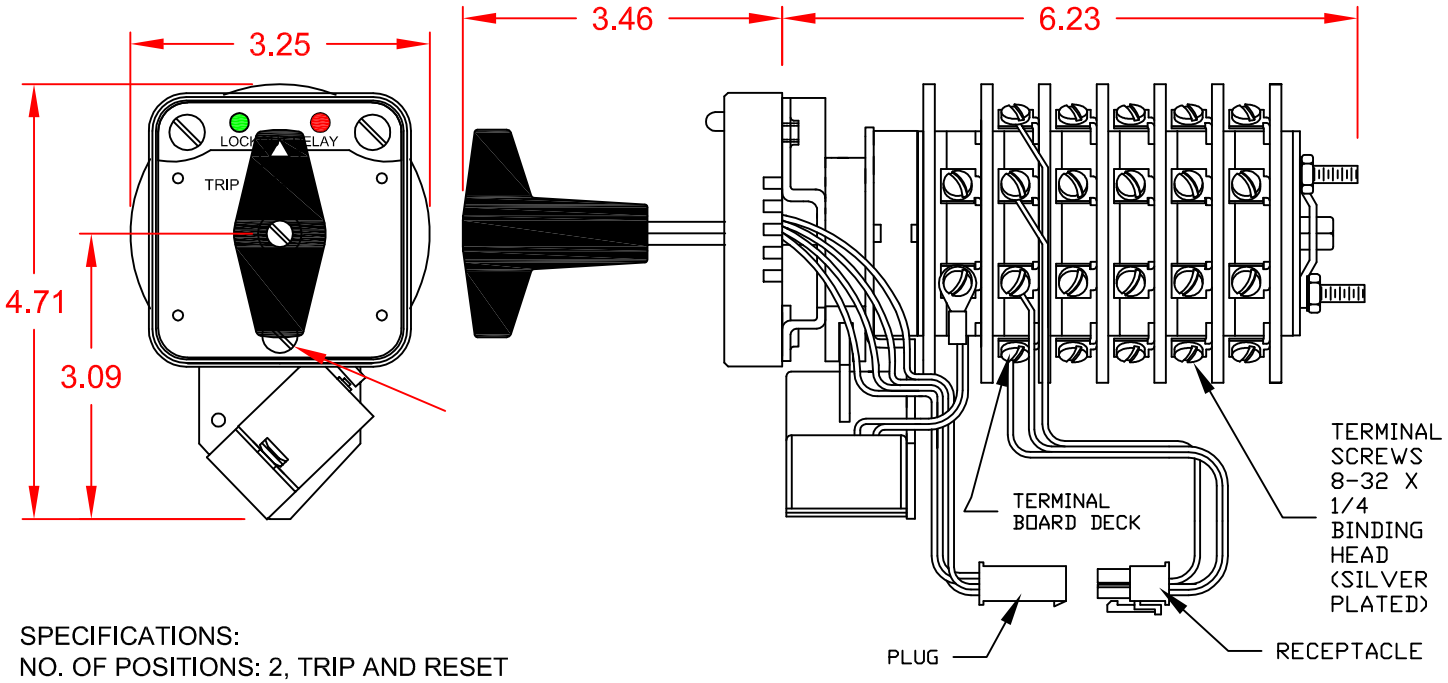

SPECIFICATIONS:
NO. OF POSITIONS: 2, TRIP AND RESET
NO. OF SECTIONS: 4
CONTACTS: 2 NORMALLY OPEN
2 NORMALLY CLOSED
PER DECK
ACTION: 45° POSITIVE TRIP DETENT
STATIONARY CONTACTS : SILVER OVER COPPER
NAMEPLATE: AS SHOWN

COIL SPECIFICATIONS:
OPERATING VOLTAGE: 125 VDC / 120 VAC
THRESHOLD VOLTAGE: 16 VDC / 20 VAC
OPERATING RANGE: 30 - 140 VDC / 30 - 140 VAC
CURRENT AT RATED VOLTAGE: 4.6 / 4.4 AMPS

ELECTRICAL RATINGS:
25 A/120 VAC 3 A/ 125 VDC
15 A/600 VAC 1 A/ 250 VDC
20 A/600 VAC (RESISTIVE)

OVERLOAD CURRENT (50 OPERATIONS):
95 A/120 VAC
65 A/240 VAC
35 A/600 VAC

DIELECTRIC STRENGTH: 2200 VRMS

INSULATION RESISTANCE: 100 MEGOHMS INITIAL

CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL

DECK	CONTACTS	POSITION TRIP	POSITION RESET
1	11 — 13		X
	12 — 18	X	
	15 — 17		X
	16 — 14	X	
2	21 — 23		X
	22 — 28	X	
	25 — 27		X
	26 — 24	X	
3	31 — 33		X
	32 — 38	X	
	35 — 37		X
	36 — 34	X	
4	41 — 43		X
	42 — 48	X	
	45 — 47		X
	46 — 44	X	

NAMEPLATE AND PANEL DRILLING DIMENSIONS

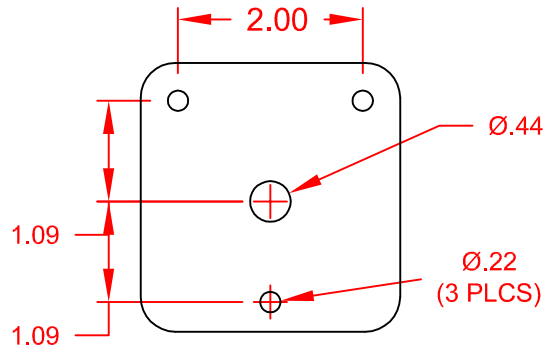

CUSTOMER REFERENCE:: TERMINAL SCREW TIGHTENING TORQUE: : 8 IN-LBS.

DESCRIPTION
7604D 125VDCCXAWP REV. -

SHALLCO
AN ISO 9001 COMPANY

308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

SHALLCO

RESET POSITION

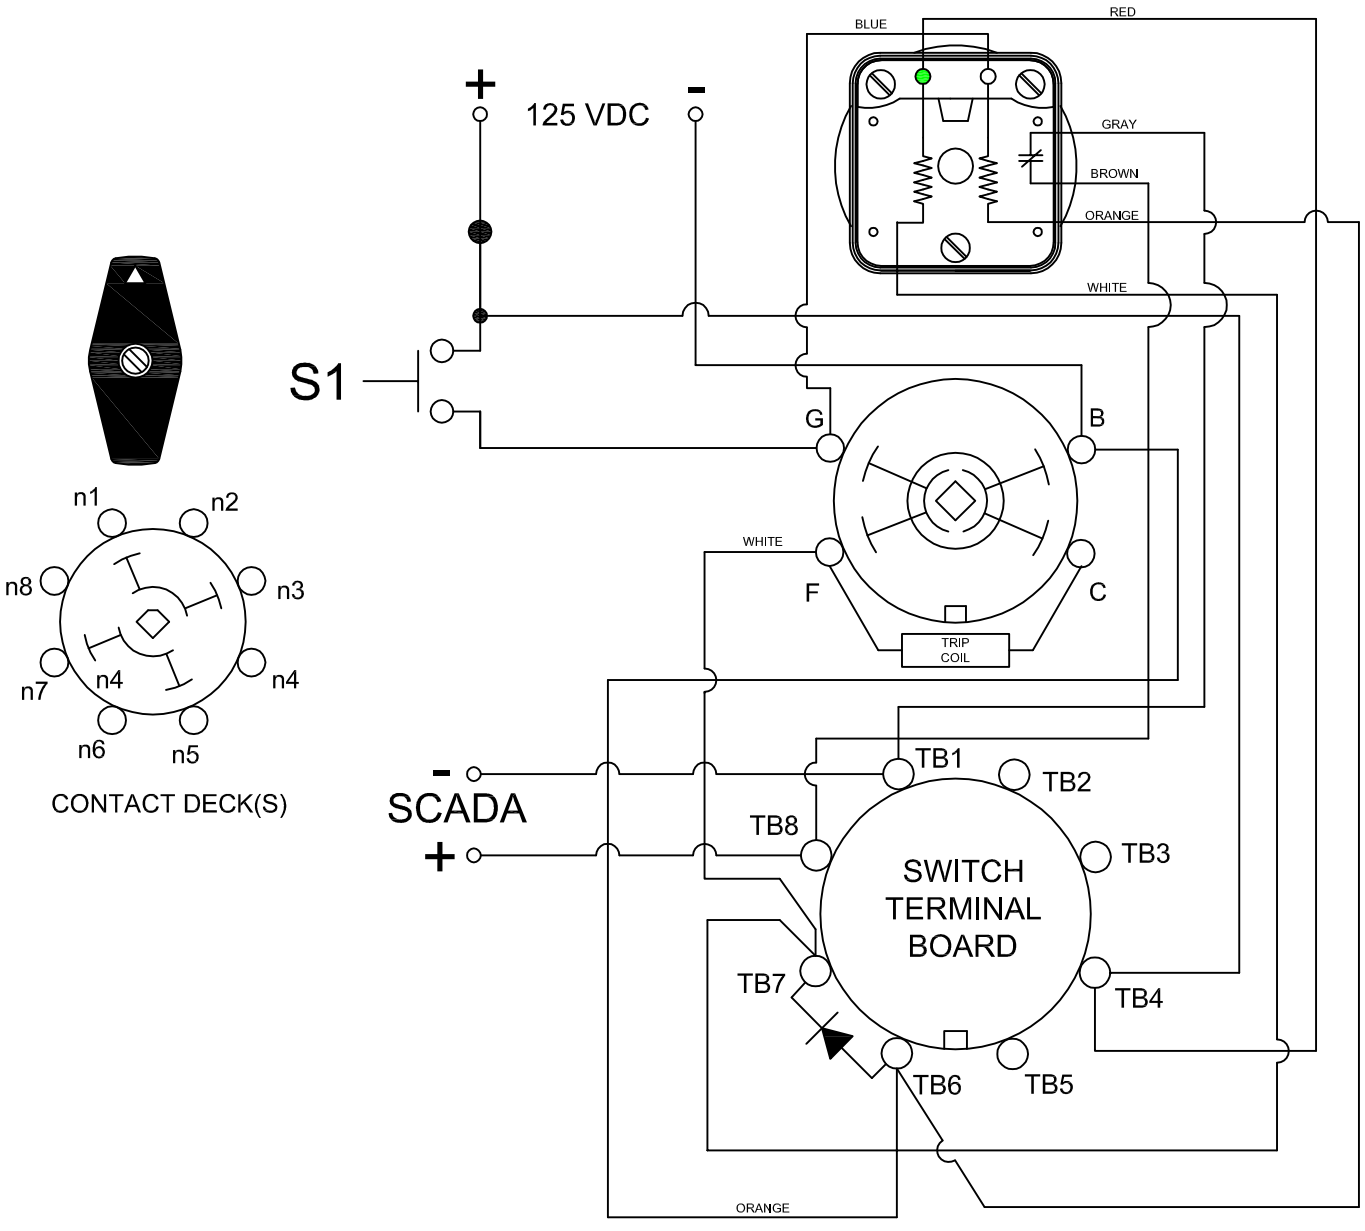

DESCRIPTION
7604D 125VDCCXAWP REV. -

SHALLCO
AN ISO 9001 COMPANY

308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

LED INDICATION

CONDITION #1	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	ON
RIGHT LED	OFF
SCADA CIRCUIT TRIP COIL MONITOR)	OPEN

LOCK-OUT RELAYS (LOR)

GENERAL OPERATION:

THE HANDLE OF THE LOR MUST BE MANUALLY ROTATED CLOCKWISE TO PLACE THE UNIT IN THE "RESET" POSITION





CONTACT DECK(S)

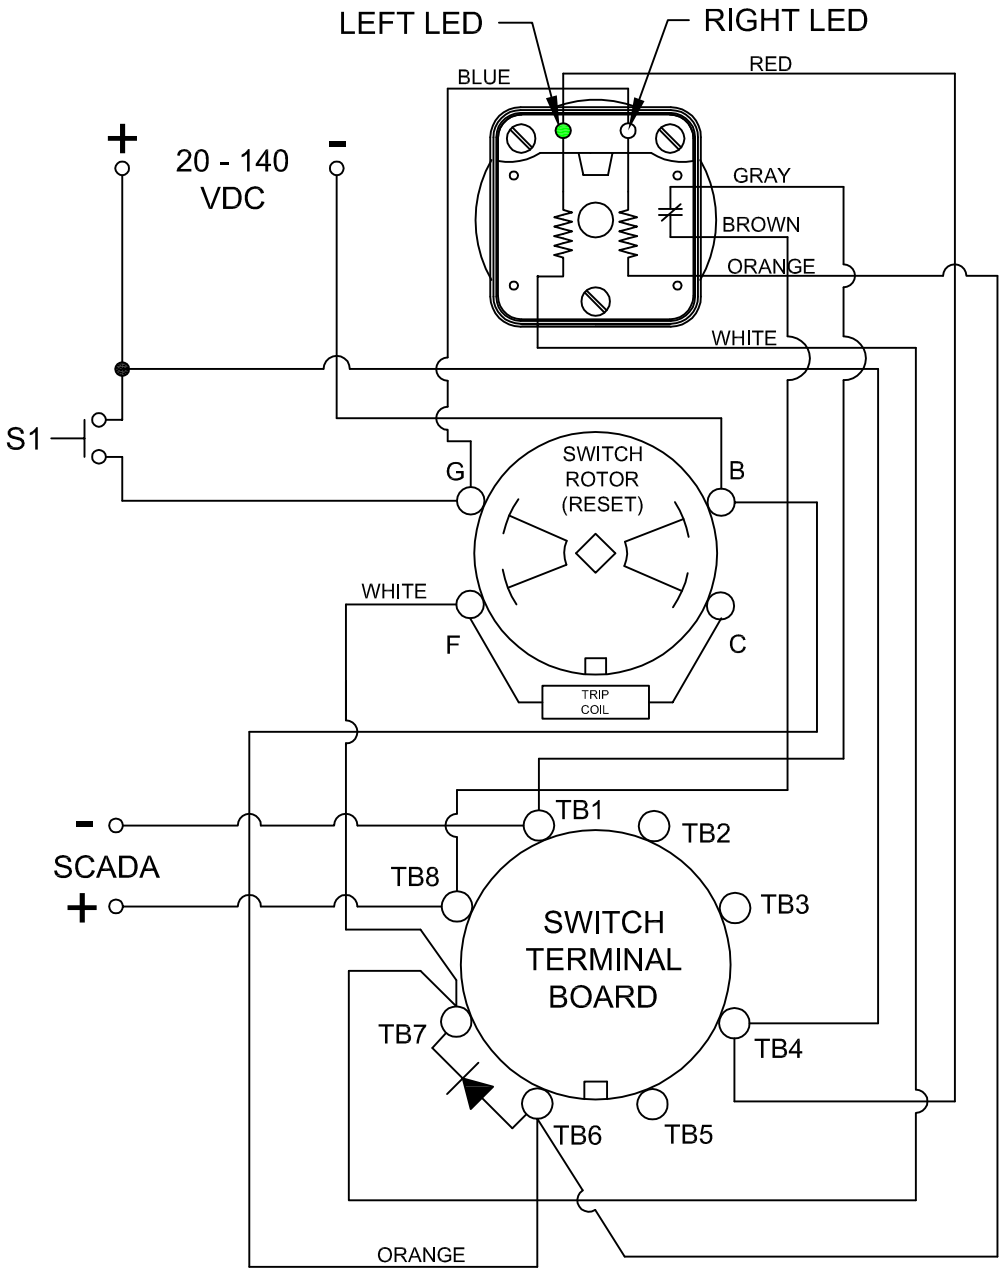

DESCRIPTION
7604D 125VDCCXAWP REV. -

SHALLCO
AN ISO 9001 COMPANY
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

SHALLCO

LED INDICATION

CONDITION #2	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	CLOSED

RESULT	
LEFT LED	OFF
RIGHT LED	ON
SCADA SWITCH	CLOSED

WHEN S1 CLOSES, THE COIL CAUSES A MECHANICAL ROTATION OF THE RELAY RESULTING IN THE SWITCH ROTOR ADVANCE TO THE "TRIP" POSITION SHOWN

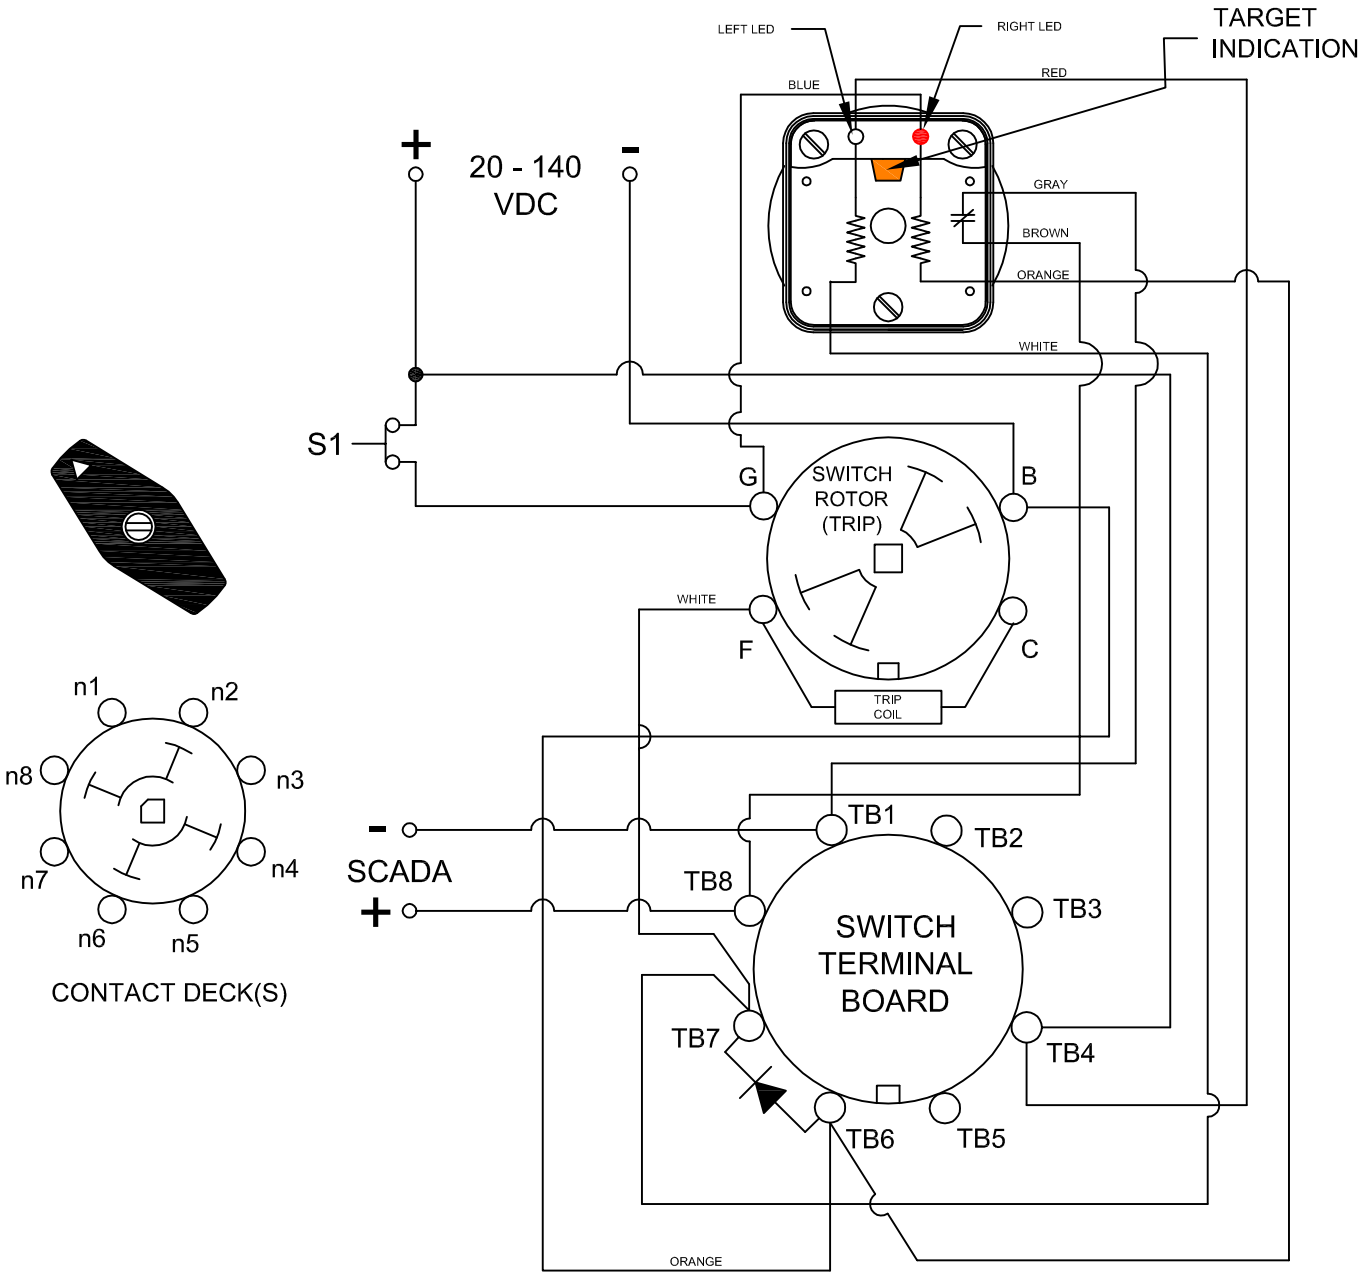

DESCRIPTION

7604D 125VDCCXAWP REV. -

SHALLCO
AN ISO 9001 COMPANY
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

SHALLCO

LED INDICATION

CONDITION #2	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	OFF
RIGHT LED	OFF
SCADA SWITCH	CLOSED

WHEN S1 REOPENS, THE RIGHT LED WILL GO OFF, THE TRIP COIL MONITOR (SCADA) CIRCUIT WILL REMAIN CLOSED UNTIL THE LOR IS ROTATED BACK TO THE RESET POSITION



CONTACT DECK(S)

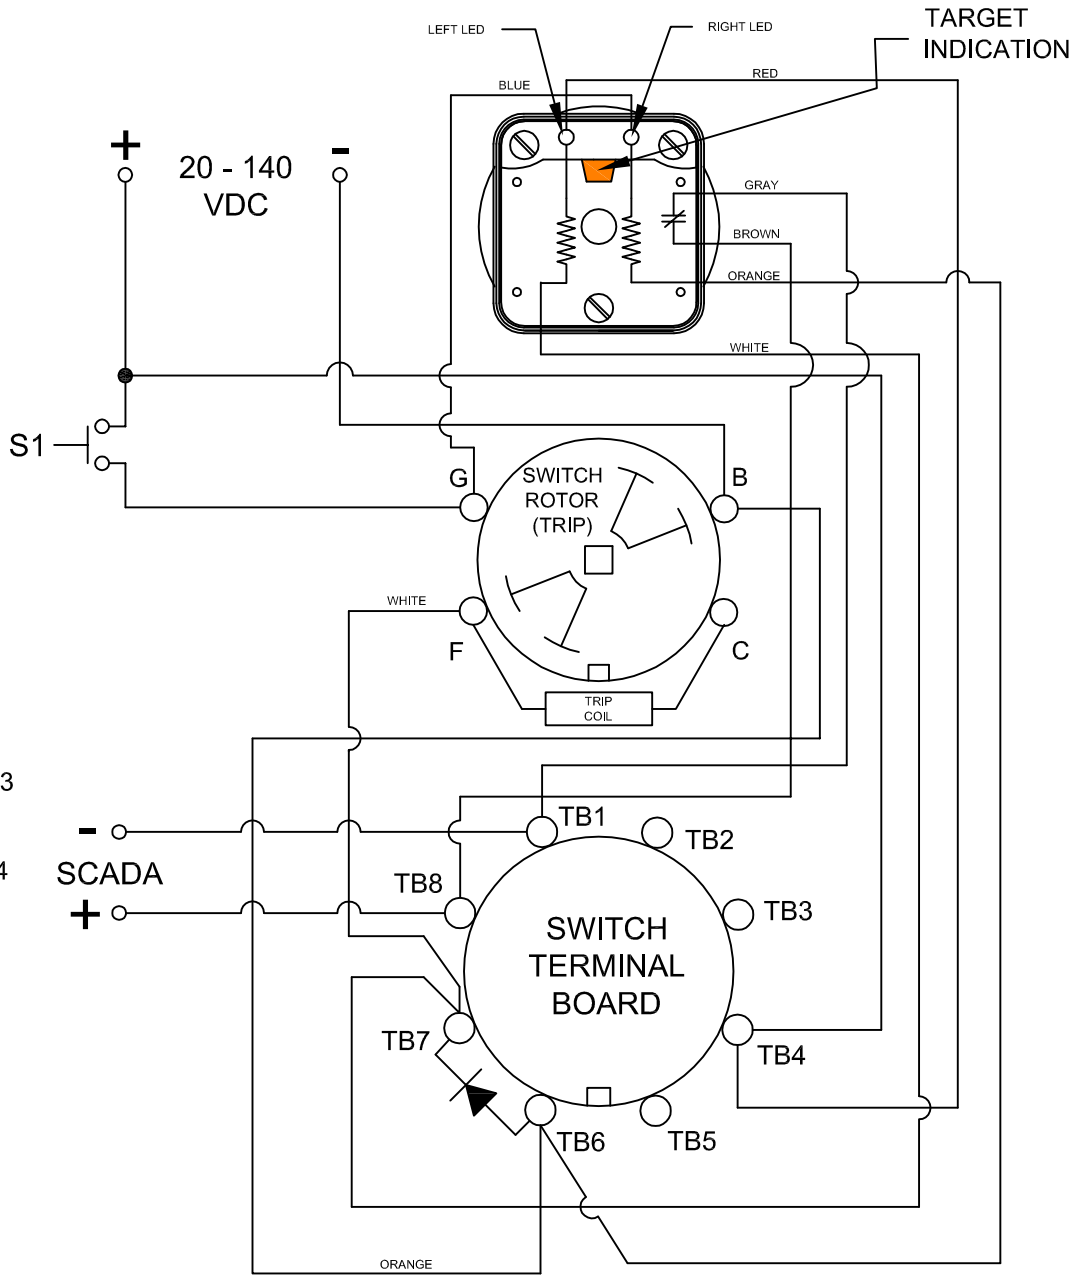

DESCRIPTION

7604D 125VDCCXAWP REV. -

SHALLCO
AN ISO 9001 COMPANY
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA