7606D 125VDCBXD

SHALLCO

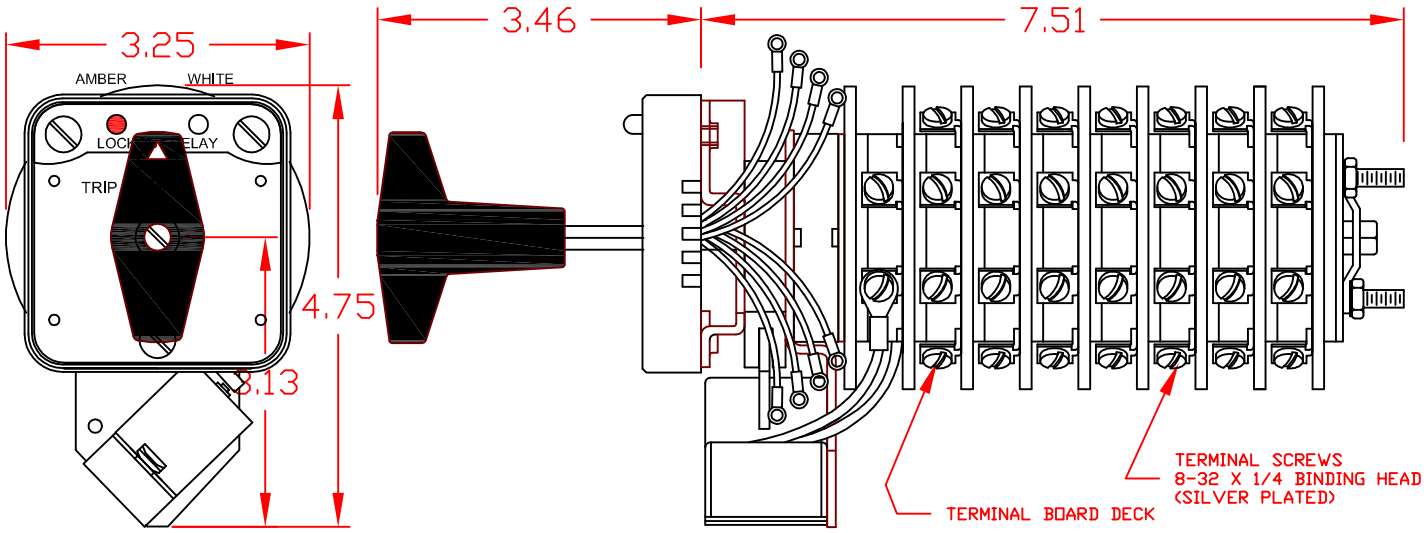

SPECIFICATIONS:
NO. OF POSITIONS: 2, TRIP AND RESET
NO. OF SECTIONS: 7
CONTACTS: 2 NORMALLY OPEN
2 NORMALLY CLOSED
PER DECK
ACTION: 45° POSITIVE TRIP DETENT
STATIONARY CONTACTS : SILVER OVER COPPER
NAMEPLATE: AS SHOWN

COIL SPECIFICATIONS:
OPERATING VOLTAGE: 125 VDC / 120 VAC
THRESHOLD VOLTAGE: 16 VDC / 20 VAC
OPERATING RANGE: 30 - 140 VDC / 30 - 140 VAC
CURRENT AT RATED VOLTAGE: 4.6 / 4.4 AMPS

ELECTRICAL RATINGS:
25 A/120 VAC 3 A/ 125 VDC
15 A/240 VAC 1 A/ 250 VDC
6 A/600 VAC

OVERLOAD CURRENT (50 OPERATIONS):
95 A/120 VAC
65 A/240 VAC
35 A/600 VAC

DIELECTRIC STRENGTH: 2200 VRMS

INSULATION RESISTANCE: 100 MEGOHMS INITIAL

CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL

DECK	CONTACTS	POSITION	
		TRIP	RESET
1	11 — 13		X
	12 — 18	X	
	15 — 17		X
	16 — 14	X	
2	21 — 23		X
	22 — 28	X	
	25 — 27		X
	26 — 24	X	
3	31 — 33		X
	32 — 38	X	
	35 — 37		X
	36 — 34	X	
4	41 — 43		X
	42 — 48	X	
	45 — 47		X
	46 — 44	X	
5	51 — 53		X
	52 — 58	X	
	55 — 57		X
	56 — 54	X	
6	61 — 63		X
	62 — 68	X	
	65 — 67		X
	66 — 64	X	

DESCRIPTION

LOCK-OUT RELAY SPECIFICATION SHEET

PART NUMBER

7606D 125VDCBXD

SHALLCO
AN ISO 9001 COMPANY

308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

SHALLCO

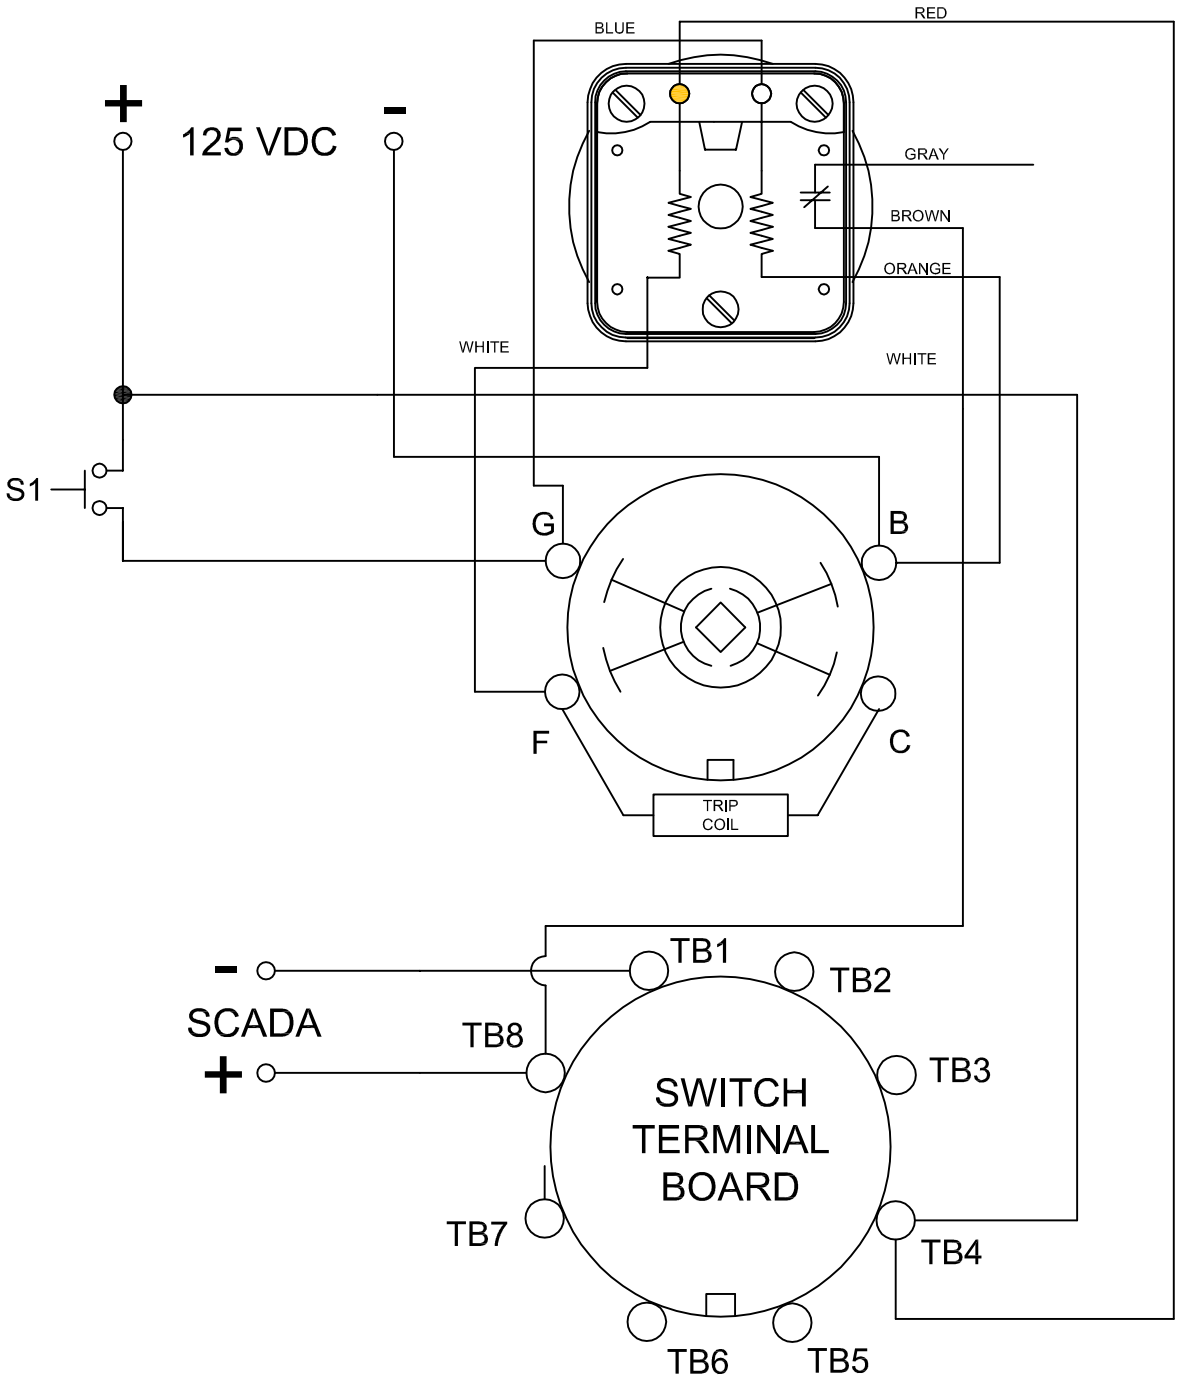

DESCRIPTION

LIGHTED ESCUTCHEON PANEL
WIRING DIAGRAM

PART NUMBER

7606D 125VDCBXD

SHALLCO
AN ISO 9001 COMPANY

308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

LOCK-OUT RELAYS (LOR)

GENERAL OPERATION:

THE HANDLE OF THE LOR MUST BE MANUALLY ROTATED CLOCKWISE TO PLACE THE UNIT IN THE "RESET" POSITION (SEE FIGURE A)

CONDITION #1	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	ON
RIGHT LED	OFF
SCADA CIRCUIT TRIP COIL MONITOR)	OPEN

FIGURE A - RESET POSITION

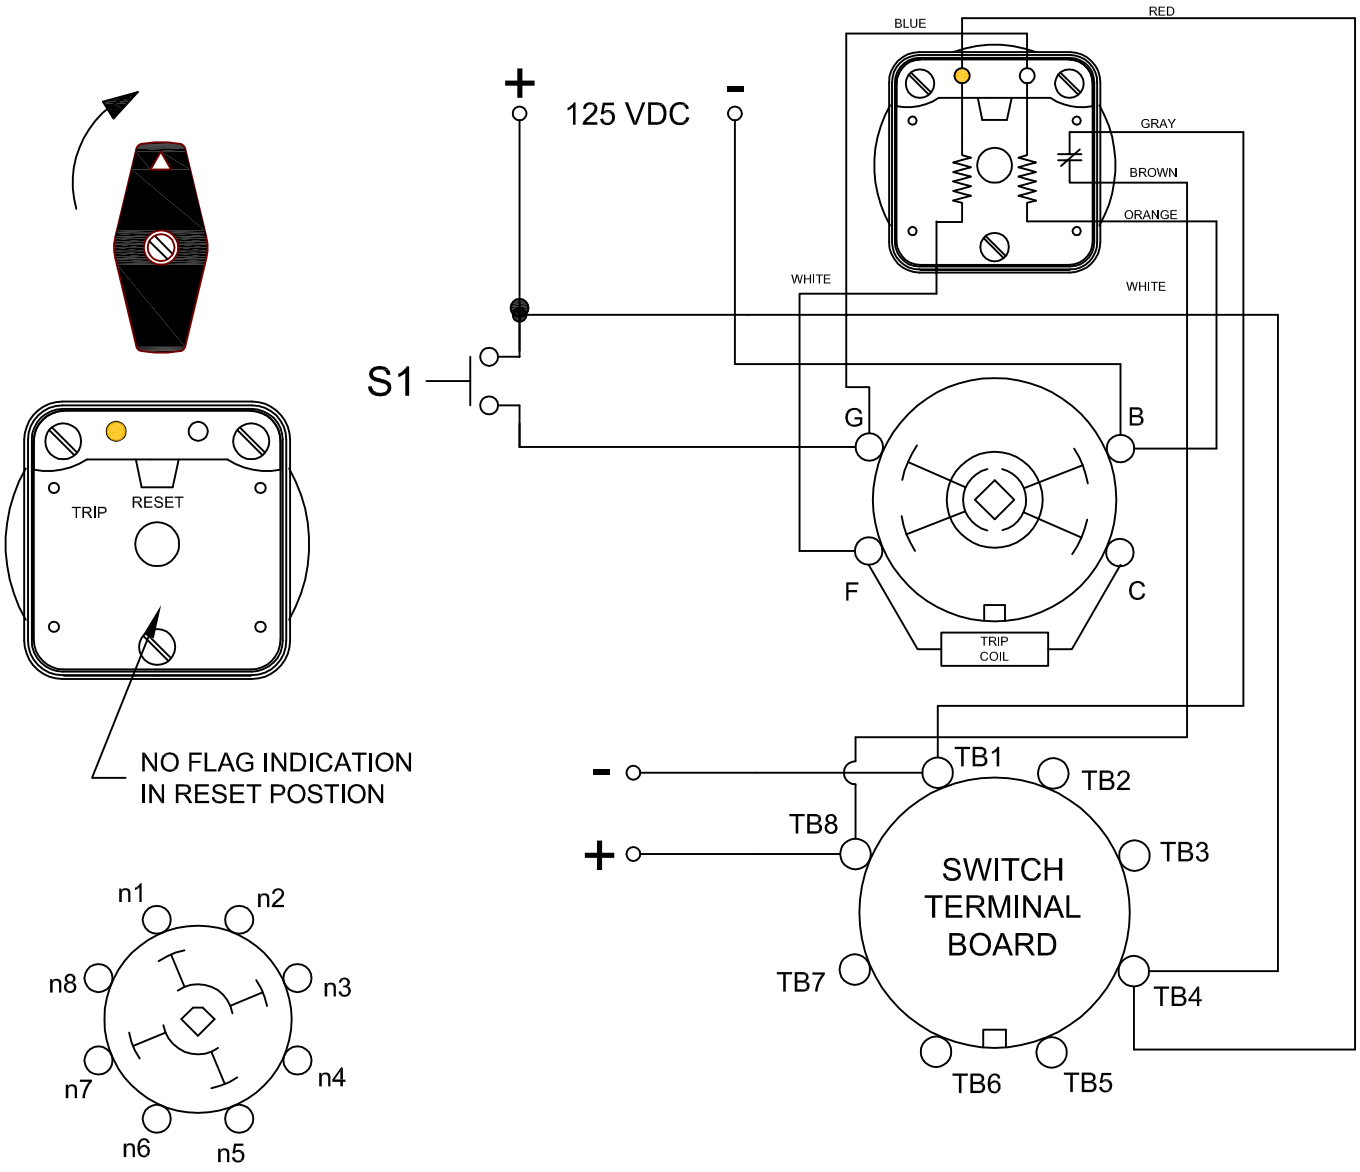

DESCRIPTION
CONTACT DECK(S)
LOCK-OUT RELAY SPECIFICATION SHEET

PART NUMBER
7606D 125VDCBXD

CONDITION #2	
ROTOR	TRIPPED (AS SHOWN)
SWITCH 1 (S1)	CLOSED

RESULT	
LEFT LED	OFF
RIGHT LED	ON
SCADA SWITCH	CLOSED

WHEN S1 CLOSES, THE COIL CAUSES A MECHANICAL ROTATION OF THE RELAY RESULTING IN THE SWITCH ROTOR ADVANCE TO THE "TRIP" POSITION SHOWN

FIGURE B - TRIP POSITION

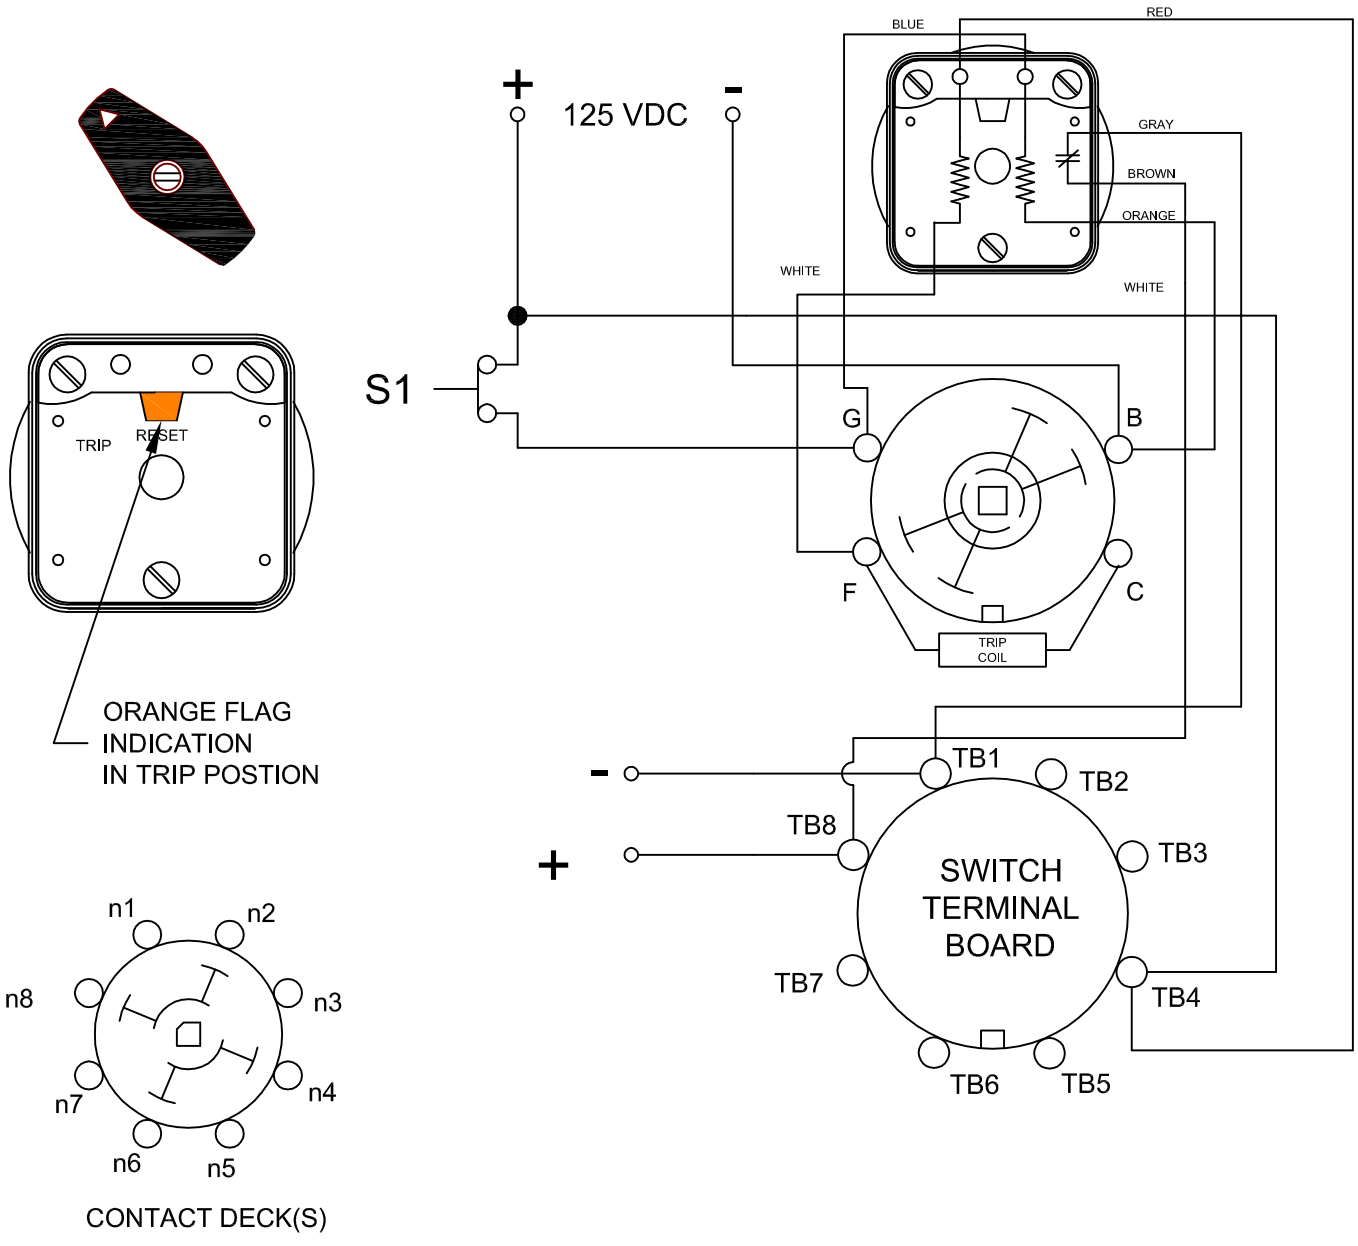

DESCRIPTION

LOCK-OUT RELAY SPECIFICATION SHEET

PART NUMBER

7606D 125VDCBXD

SHALLCO
AN ISO 9001 COMPANY

308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

SHALLCO

CONDITION #2	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	OFF
RIGHT LED	OFF
SCADA SWITCH	CLOSED

WHEN S1 REOPENS, THE SCADA CIRCUIT WILL REMAIN CLOSED UNTIL THE LOR IS ROTATED BACK INTO THE RESET POSITION

FIGURE B - TRIP POSITION

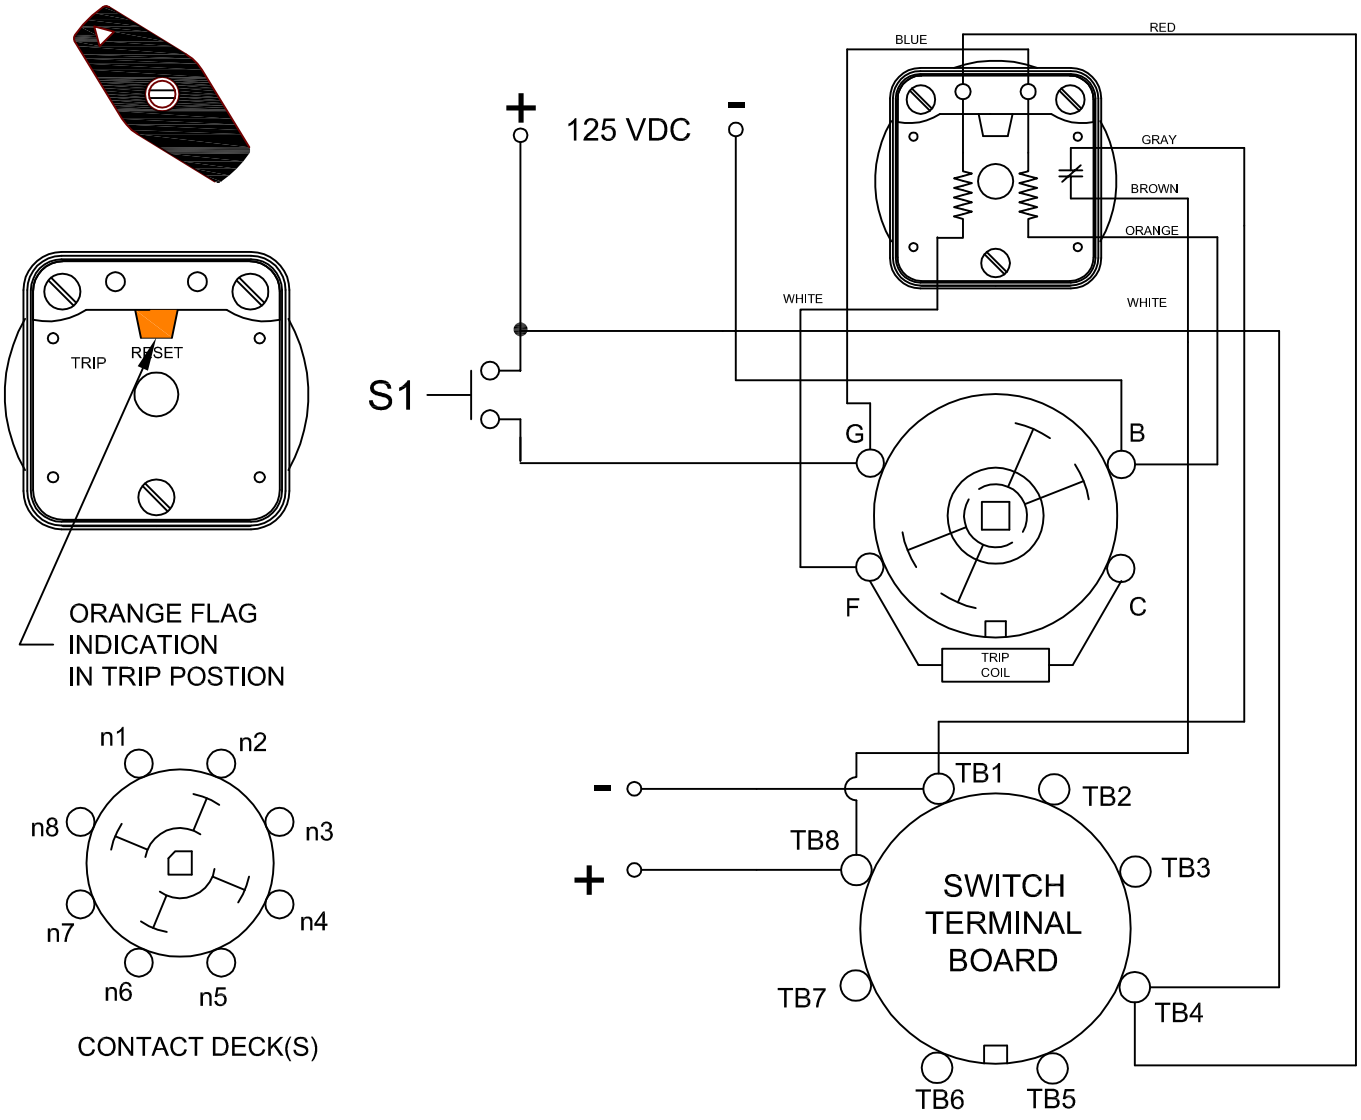

DESCRIPTION

LOCK-OUT RELAY SPECIFICATION SHEET

PART NUMBER

7606D 125VDCBXD