7607G 125VDCEXX

SHALLCO

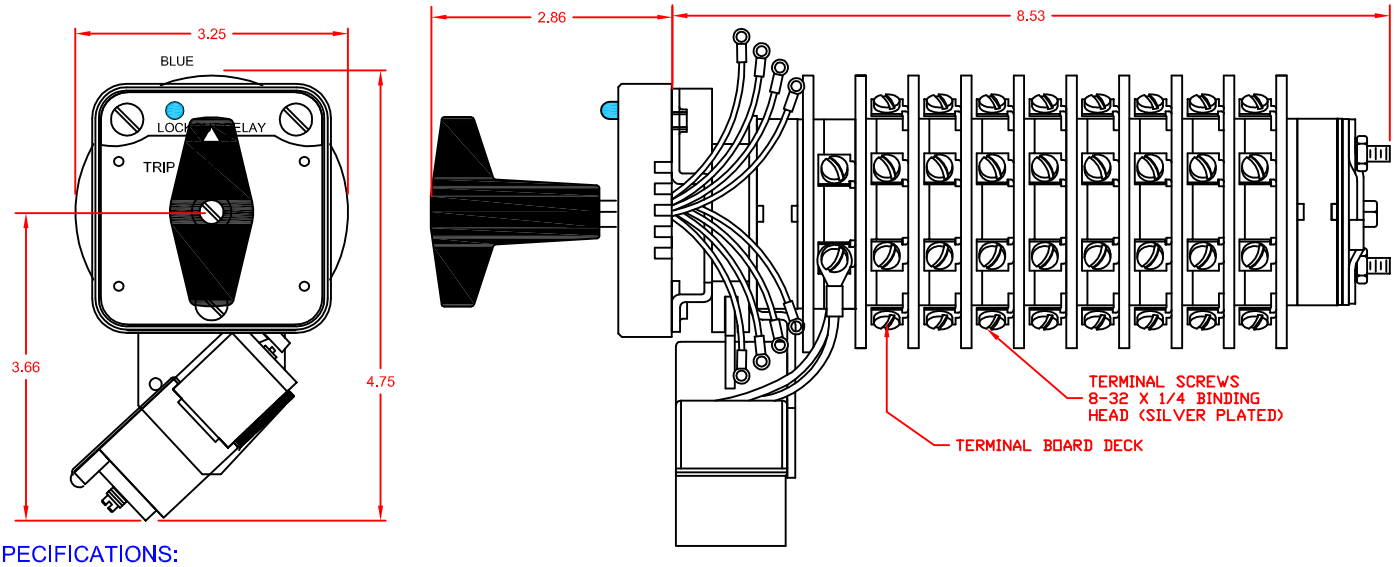

SPECIFICATIONS:

NO. OF POSITIONS: 2, TRIP AND RESET
NO. OF ACTIVE SECTIONS: 7

CONTACTS: 2 NORMALLY OPEN
2 NORMALLY CLOSED
PER DECK
ACTION: 45° POSITIVE TRIP DETENT
STATIONARY CONTACTS : SILVER OVER COPPER
NAMEPLATE: AS SHOWN

COIL SPECIFICATIONS:

THE THRESHOLD VOLTAGE FOR THIS LOCK OUT RELAY IS 70 VDC. THIS LOCKOUT RELAY MUST NOT OPERATE AT ANY VOLTAGE BELOW 70 VDC.

THIS COIL MUST OPERATE AT 90 TO 140 VDC

ELECTRICAL RATINGS:

25A/120 VAC 15A/600 VAC
20A/600 VAC (RESISTIVE)
3A/125 VDC 1A/250 VDC

DECK	CONTACTS	POSITION TRIP	POSITION RESET
1	11 — 13		X
	12 — 18	X	
	15 — 17		X
	16 — 14	X	
2	21 — 23		X
	22 — 28	X	
	25 — 27		X
	26 — 24	X	
3	31 — 33		X
	32 — 38	X	
	35 — 37		X
	36 — 34	X	
4	41 — 43		X
	42 — 48	X	
	45 — 47		X
	46 — 44	X	

DECK	CONTACTS	POSITION TRIP	POSITION RESET
5	51 — 53		X
	52 — 58	X	
	55 — 57		X
	56 — 54	X	
6	61 — 63		X
	62 — 68	X	
	65 — 67		X
	66 — 64	X	
7	71 — 73		X
	72 — 78	X	
	75 — 77		X
	76 — 74	X	

OVERLOAD CURRENT (50 OPERATIONS):
95 A/120 VAC
65 A/240 VAC
35 A/600 VAC

DIELECTRIC STRENGTH: 2200 VRMS

INSULATION RESISTANCE: 100 MEGOHMS INITIAL

CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL

PANEL DRILLING

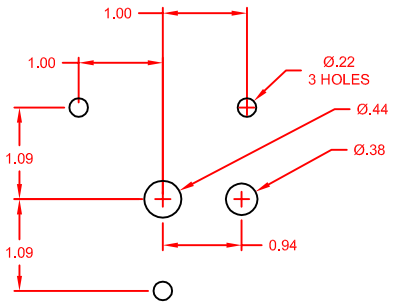

PART NUMBER
7607G 125VDCEXX

SHALLCO
AN ISO 9001 COMPANY
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

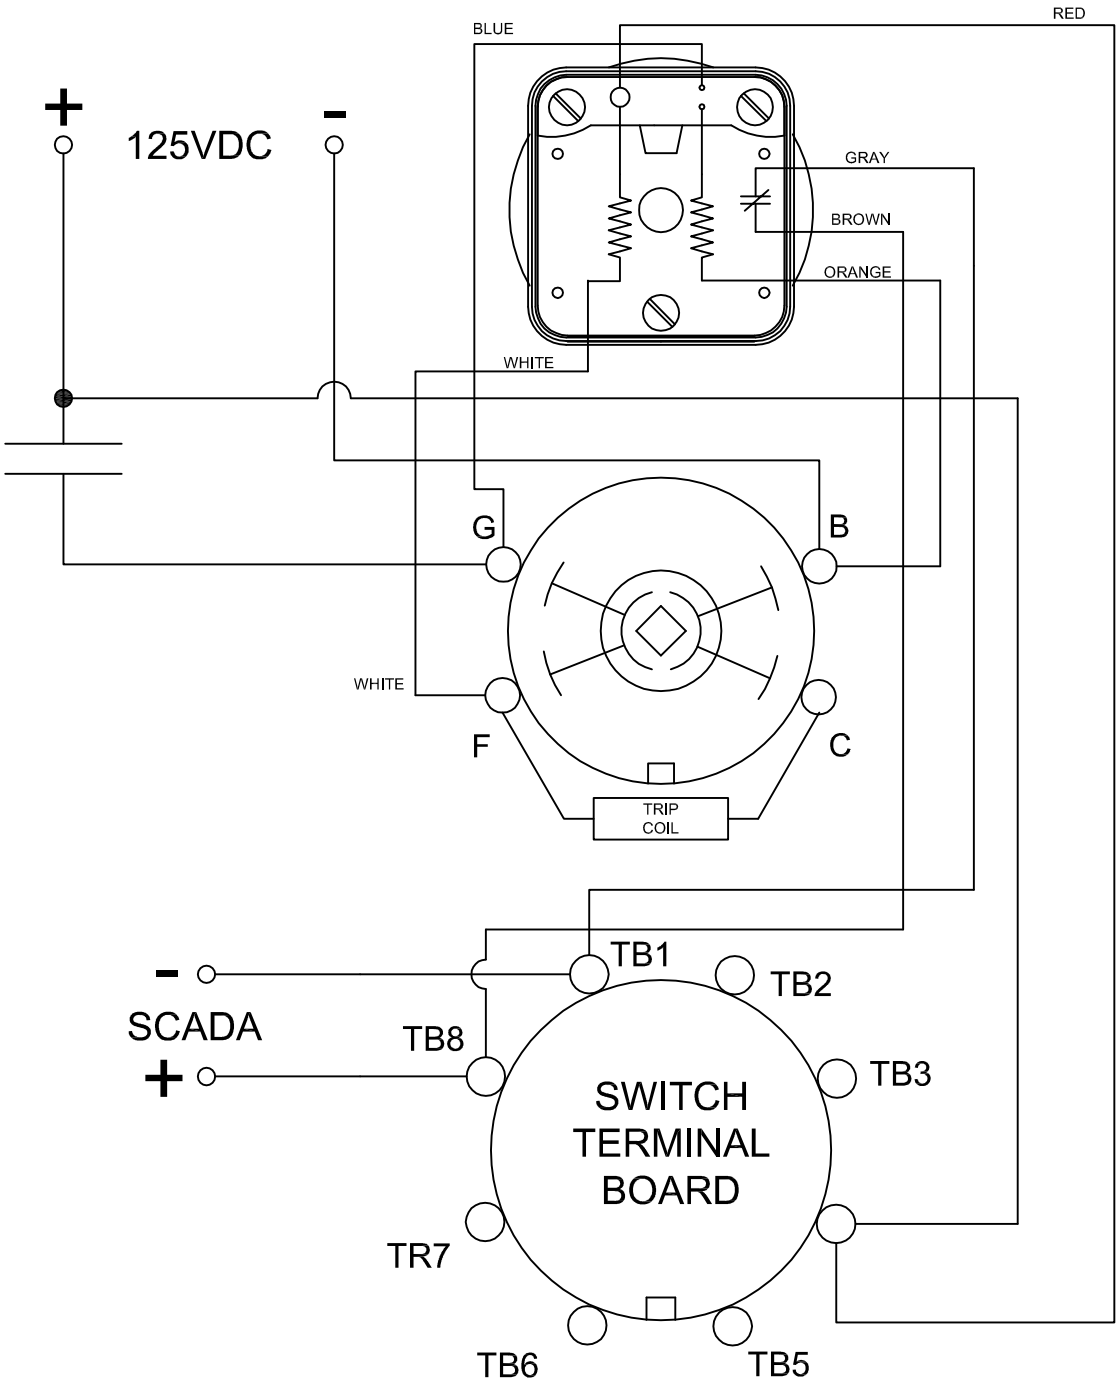

PART NUMBER

7607G 125VDCEXX

SHALLCO
AN ISO 9001 COMPANY
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

LOCK-OUT RELAYS (LOR)

GENERAL OPERATION:

CONDITION #1	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	ON
SCADA CIRCUIT TRIP COIL MONITOR)	OPEN

THE HANDLE OF THE LOR MUST BE MANUALLY ROTATED CLOCKWISE TO PLACE THE UNIT IN THE "RESET" POSITION (SEE FIGURE A)

FIGURE A - RESET POSITION

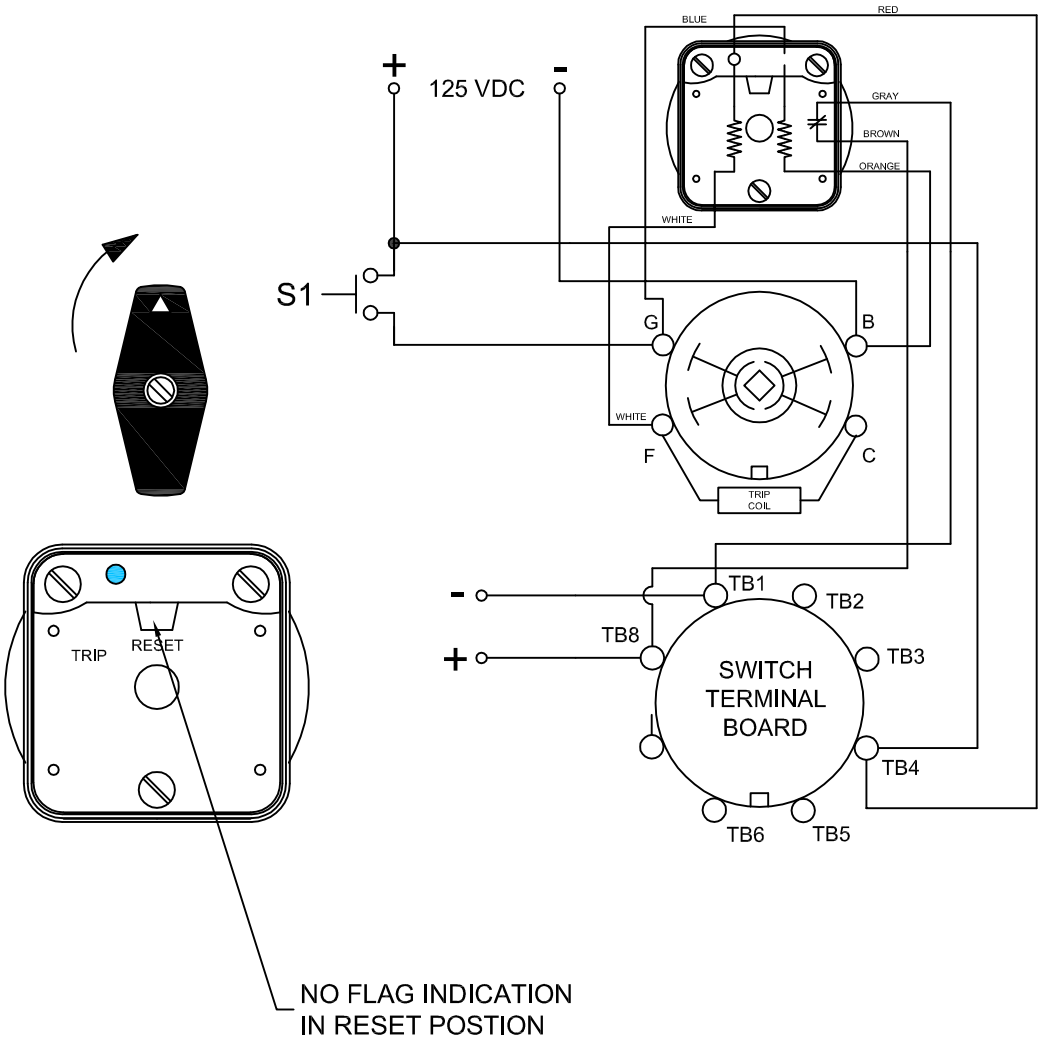



CONTACT DECK(S)

PART NUMBER

7607G 125VDCEXX

SHALLCO
AN ISO 9001 COMPANY
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

CONDITION #2	
ROTOR	TRIP (AS SHOWN)
SWITCH 1 (S1)	CLOSED

RESULT	
LEFT LED	OFF
SCADA SWITCH	CLOSED

WHEN S1 CLOSES, THE COIL CAUSES A MECHANICAL ROTATION OF THE RELAY RESULTING IN THE SWITCH ROTOR ADVANCE TO THE "TRIP" POSITION SHOWN

FIGURE B - TRIP POSITION

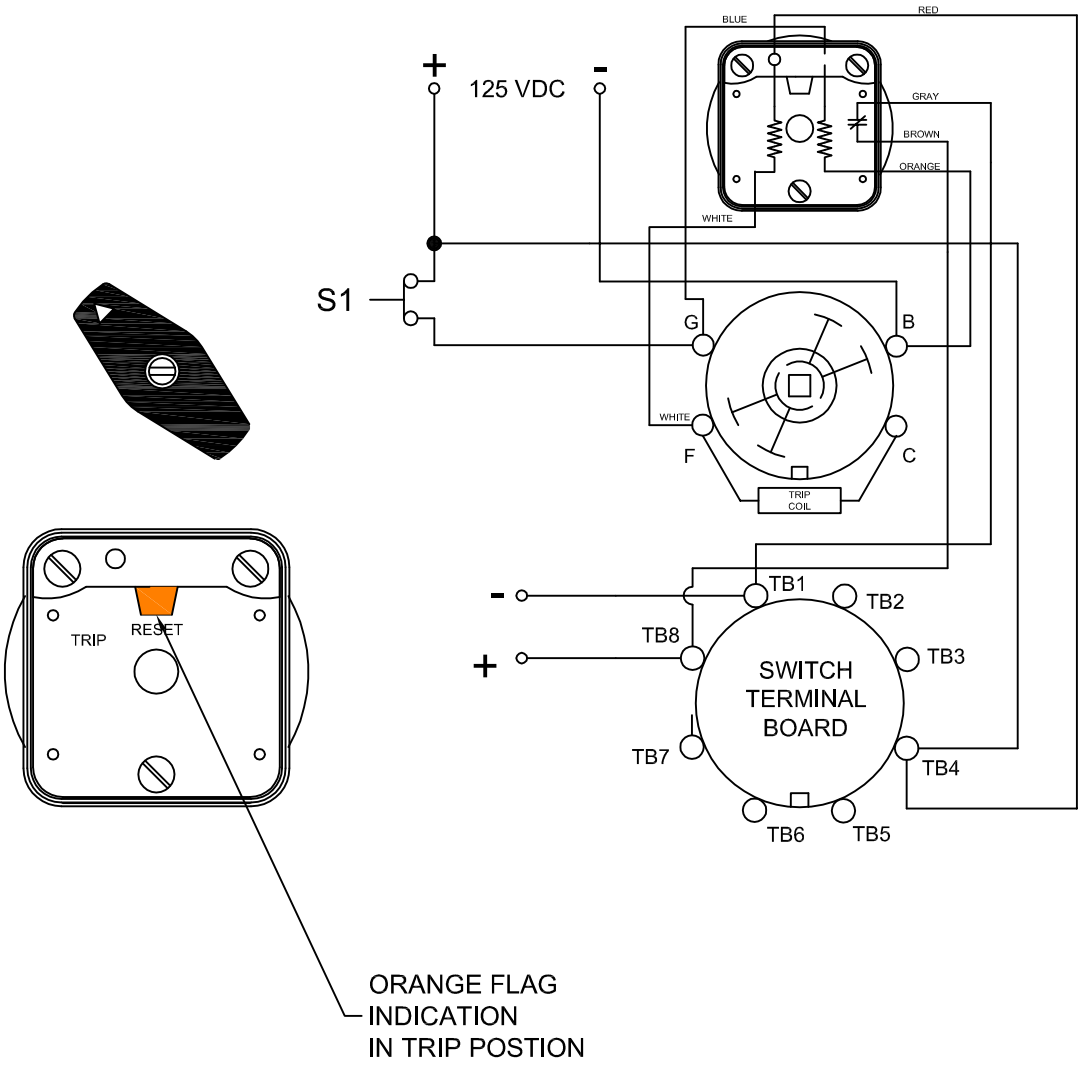



CONTACT DECK(S)

PART NUMBER

7607G 125VDCEXX

SHALLCO
AN ISO 9001 COMPANY
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

CONDITION #2	
ROTOR	TRIP (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	OFF
SCADA SWITCH	CLOSED

WHEN S1 OPENS,THE RELAY REMAINS TRIPPED, THE LEFT LED REMAINS OFF AND THE SCADA CIRCUIT REMAINS CLOSED UNTIL THE SHAFT IS ROTATED BACK INTO THE "RESET" POSITION.

FIGURE B - TRIP POSITION

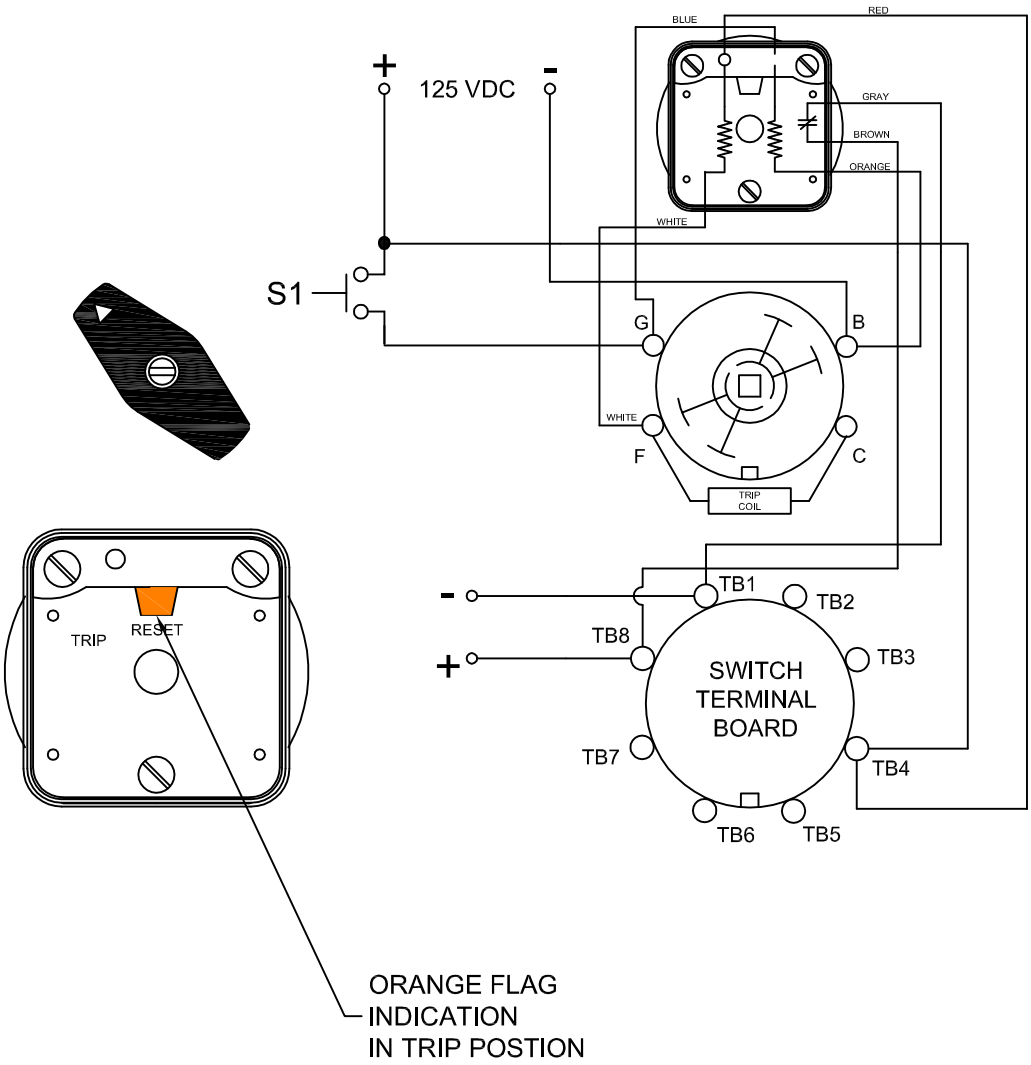



CONTACT DECK(S)

PART NUMBER

7607G 125VDCEXX

SHALLCO
AN ISO 9001 COMPANY
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA