SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

SHALLCO SERIES 26
Part Number: 76203D 125VDCAXC

General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 VDC resistive loads

Electrical:
* Voltages: 250 V DC, 600 VAC
* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial
* Switch is supplied with a lighted escutcheon plate:
  Input voltage: 125 VDC (40 - 140 VDC)
  Wiring: As shown

Mechanical:
* Sections: 3
* Positions: 2, Spring Return to Center (Off)
* Indexing: 45°
* Rotational Life: 65,000 operations

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

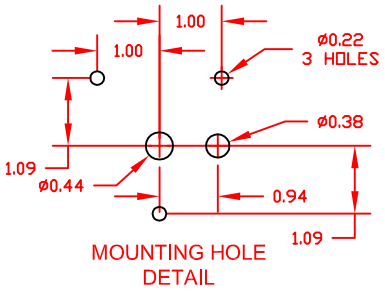

MOUNTING HOLE DETAIL

DECK	CONTACT	POSITION TRIP	NORMAL	CLOSE
1	18 - 11	X		
	11 - 12			
	12 - 13			X
	14 - 15	X		
	15 - 16		X	
	16 - 17			X
2	28 - 21	X		
	21 - 22		X	
	22 - 23			X
	24 - 25	X		
	25 - 26		X	
	26 - 27			X
3	38 - 31	X		
	31 - 32		X	
	32 - 33			X
	34 - 35	X		
	35 - 36		X	
	36 - 37			X

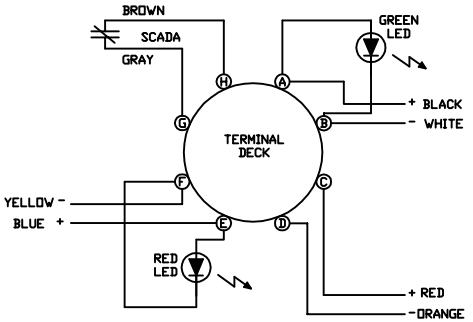
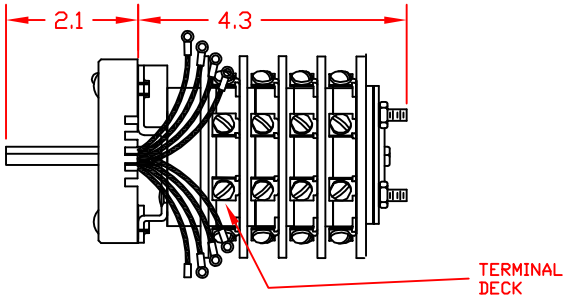
HANDLE