DESCRIPTION

111-BM-23

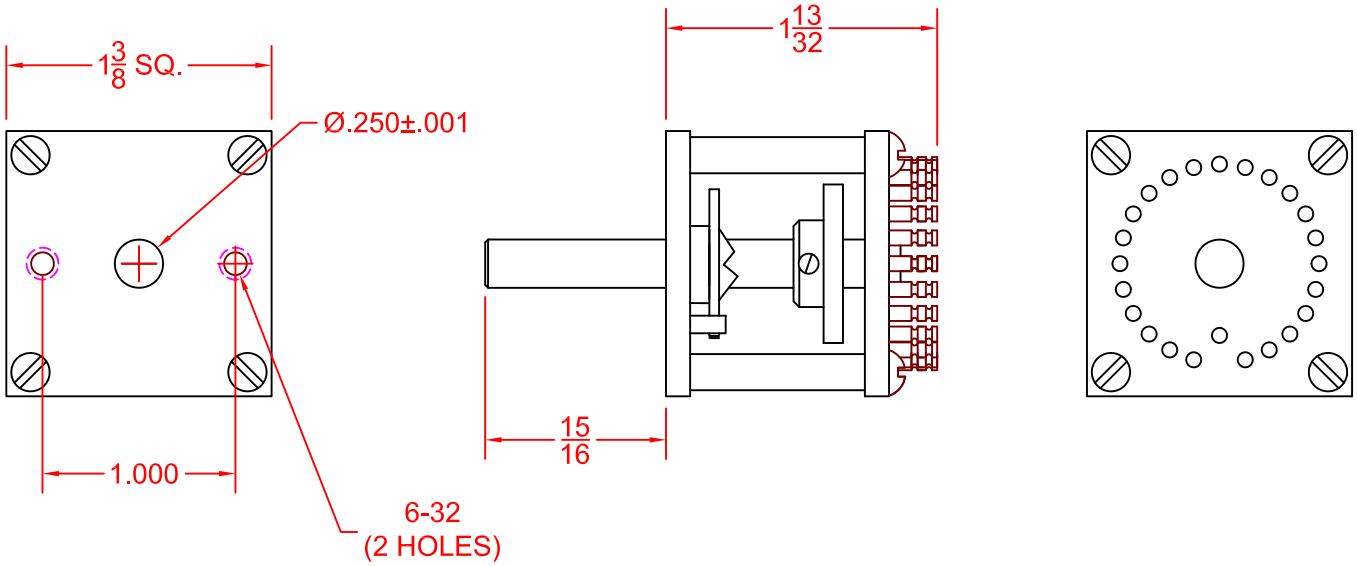

SHALLCO PART NUMBER 111-BM-23

DESCRIPTION:
NO. OF DECKS: 1
NO OF POLES PER DECK: 1
NUMBER OF POSITIONS: 23
TYPE ACTION: SHORTING
ANGLE OF THROW: 15°

ELECTRICAL:
CURRENT CARRY CAPACITY: 10 AMPS
CURRENT SWITCHING CAPACITY: UP TO 2 AMPS
CONTACT RESISTANCE: .005 OHMS INITIAL
INSULATION RESISTANCE: 50,000 MEGOHMS INITIAL
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS INITIAL

MECHANICAL:
ROTATIONAL LIFE: 50,000 CYCLES MIN. (ONE CYCLE=ONE FULL
CW AND ONE FULL CCW ROTATION)
STOP TORQUE: 50 IN-LBS
CONSTRUCTION: OPEN FRAME
WIPERS AND CONTACT PANELS: DUAL SILVER ALLOY WIPERS
EPOXY LAMINATE PANELS WITH .025 SILVER HEADED CONTACTS

DESCRIPTION: 111-BM-23	DRAWN	P.DORMAN 7-27-15
	SCALE	1X
SHALLCO 308 COMPONENTS DRIVE SMITHFIELD, NC 27577 USA	111-BM-23	
	SHEET 1 OF 1	